



TECHNICAL DOCUMENTATION
OF

PLACEMENT
OPPORTUNITIES
WITH
ENTREPRENEURIAL
REACH

PLATFORM



The report presents Placement Opportunities With Entrepreneurial Reach (POWER) platform with special focus on technical aspects. The platform is based and builds on the results from WP1 (interviews, surveys, analysis of other platforms etc.) and offers functional specifications of the POWER platform. The file is for those who would like to maintain and develop system in the future.

The repository of the software is stored in GitLab with detailed documentation of code and implemented changes.

The additional information about code is founded in *power-djboot-master.tar.gz* file.

The documentation is split in the following parts:

- Project directory structure
- Runtime platform NGNIX
- Database schema

Release version	Date	Changes	Responsible person
1.0	30.04.2021		TUL IT team
2.0	31.08.2021		TUL IT team
3.0	31.12.2021		TUL IT team
4.0	30/04/2022		TUL IT team



Content

1.	Introduction	5
2.	Directory structure.....	6
3.	Runtime platform - NGINX	7
4.	Directory of the POWER platform.....	8
1.	/app.....	8
2.	/media.....	8
3.	/power	8
5.	/Power - Main directory of the POWER platform.....	9
4.	/migrations.....	9
5.	/modules.....	9
6.	/static.....	9
7.	/templates.....	9
8.	admin.py.....	9
9.	apps.py.....	9
10.	forms.py	9
11.	managers.py.....	11
12.	models.py.....	11
13.	queries.py.....	14
14.	urls.py	15
15.	views.py.....	17
6.	Directory /templates	18
16.	startup_account.html	18
17.	incubator_account.html.....	25
18.	student_account.html.....	35
19.	student_profile_card.html.....	41
20.	university_account.html.....	43
21.	offer_edit.html.....	49



22.	<i>offer_preview.html</i>	57
7.	Database schema of the POWER platform.....	63
23.	<i>auth_group</i>	63
24.	<i>power_customuser</i>	63
25.	<i>power_customuser_groups</i>	64
26.	<i>power_incubatorprofile</i>	64
27.	<i>power_joboffer</i>	65
28.	<i>power_jobofferdocuments</i>	65
29.	<i>power_jobofferstudentdocuments</i>	66
30.	<i>power_jobofferstudentdocuments</i>	66
31.	<i>power_startupperprofile</i>	67
32.	<i>power_studentprofile</i>	67
33.	<i>power_universityprofile</i>	67



1. Introduction

The POWER platform is built on the Django Boilerplate development platform. Django is a full featured Python Web framework that follows the model-view-template architectural pattern. It removes the complexity of creating database-driven websites with plug and play components and allows rapid development for web projects.


Main software versions used in the POWER platform:

- Python 3.6.9
- Django 3.0.4



2. Directory structure

The directory structure of the POWER platform, taking into account the essential elements of the platform:

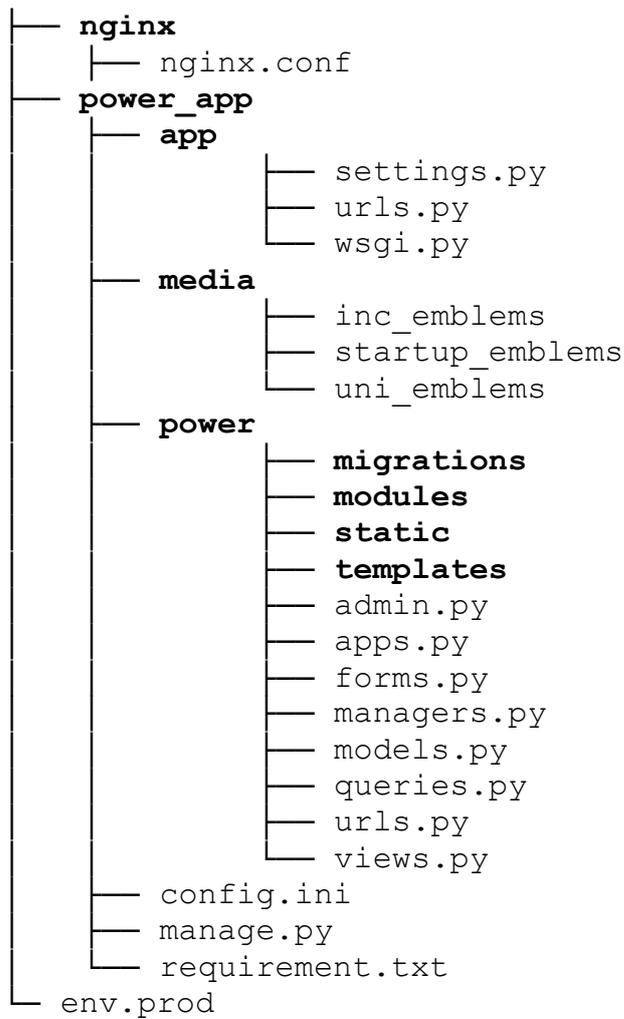



3. Runtime platform - NGINX

The POWER application runs on the NGINX web platform, the configuration of which is located in the `/nginx/nginx.conf` file.

`/nginx/nginx.conf`

```
server {
    listen 80;
    server_name power.cti.p.lodz.pl;
    return 301 https://power.cti.p.lodz.pl$request_uri;
}

server {
    listen 443 ssl;

    server_name power.cti.p.lodz.pl;

    ...
}
```



4. Directory of the POWER platform

1. /app

Dostęp administracyjny do aplikacji POWER oraz jej konfiguracja

2. /media

Katalog w który przechowywane są obiekty wgrywane przez użytkowników w tym loga poszczególnych użytkowników platformy

3. /power

Główny katalog w którym znajduje się kod całej platformy



5. /Power - Main directory of the POWER platform

4. /migrations

The catalog contains modifications to the database structure that were created during the creation of the platforms.

5. /modules

Additional modules – describe In 6. /modules

6. /static

Directory with static elements – describe In 7. /static

7. /templates

The POWER platform templates – describe In 8. /templates

8. admin.py

```
class CustomUserAdmin (UserAdmin) :
```

9. apps.py

```
from django.apps import AppConfig

class PowerConfig (AppConfig) :
```

10. forms.py

```
from .models import (
    StudentProfile,
    CustomUser,
    UniversityRequestToJoin,
    UniversityProfile,
    UniversityDomains,
    IncubatorProfile,
    StartupProfile,
    JobOffer,
    JobOfferDocuments,
    JobOfferStudentDocuments,
    RecruitmentStatus,
)

class LoginForm (forms.Form) :
```



```
class RegisterForm (UserCreationForm) :

class UserChangeForm (UserChangeForm) :

class RegisterStartupName (forms.ModelForm) :

class StudentUpdateInfoForm (forms.ModelForm) :

class UniversityUpdateInfoForm (forms.ModelForm) :

class ImageUploadForm (forms.Form) :

class UniversityDomainsForm (forms.ModelForm) :

class UniversityRequestForm (forms.ModelForm) :

class IncubatorUpdateInfoForm (forms.ModelForm) :

class IncubatorDescriptionUpdateForm (forms.ModelForm) :

class StartupUpdateInfoForm (forms.ModelForm) :

class StartupDescriptionUpdateForm (forms.ModelForm) :

class JobOfferInitialInfo (forms.ModelForm) :

class JobOfferDetailsInfo (forms.ModelForm) :

class JobOfferSkills (forms.ModelForm) :

class JobOfferDescription (forms.ModelForm) :

class JobOfferResponsibilitiesForm (forms.ModelForm) :

class JobOfferBenefitsForm (forms.ModelForm) :

class JobOfferDocumentsForm (forms.ModelForm) :

class JobOfferStudentApplyForm (forms.ModelForm) :
```



```
class RecruitmentStatusForm(forms.ModelForm):
```

11. managers.py

```
class CustomUserManager(BaseUserManager):
    """
    Custom user model manager where email is the unique identifiers
    for authentication instead of usernames.
    """

    def create_user(self, email, password, **extra_fields):
        """
        Create and save a User with the given email and password.
        """

    def create_superuser(self, email, password, **extra_fields):
```

12. models.py

```
def convert_emblem_name(instance, filename):
    f_hash = hashlib.md5(filename.encode("utf-8")).hexdigest()
    filename = "%s_%s_%s" % (instance.user.id, f_hash, filename)
    return os.path.join("static/img/", filename)

def convert_document_name(instance, filename):
    f_hash = hashlib.md5(filename.encode("utf-8")).hexdigest()
    filename = "%s_%s_%s" % (instance.student.id, f_hash, filename)
    return os.path.join("documents/", filename)

class UniversityRequestToJoin(models.Model):
    univeristy_name = models.CharField(max_length=250, blank=True)
    country = models.CharField(max_length=250, blank=True)
    email = models.EmailField(max_length=254)
    message = models.TextField(max_length=1000, blank=True)

class CustomUser(AbstractUser):
    username = None
    account_type = models.CharField(max_length=30)
    email = models.EmailField(_("email address"), unique=True)

    USERNAME_FIELD = "email"
    REQUIRED_FIELDS = []

    objects = CustomUserManager()

class ISCED(models.Model):
    area_of_studies = models.CharField(max_length=250, blank=True)
```



```

class StudentProfile(models.Model):
    class Degrees(models.TextChoices):
        B = "B", "Bachelor's degree"
        Msc = "Msc", "Master's degree"
        Phd = "Phd", "Doctoral degree"

    user = models.OneToOneField(CustomUser, on_delete=models.CASCADE)
    linkedin = models.URLField(max_length=200, blank=True)
    area_of_studies = models.CharField(max_length=200, blank=True, default=1)
    degree = models.CharField(max_length=3, choices=Degrees.choices)
    home_institution = models.CharField(max_length=200, blank=True)
    country = models.CharField(max_length=200, blank=True)
    skills = models.TextField(max_length=500, blank=True)
    languages = models.TextField(max_length=500, blank=True, default="[]")

class IncubatorProfile(models.Model):
    user = models.OneToOneField(CustomUser, on_delete=models.CASCADE)
    emblem = models.FileField(
        upload_to=convert_emblem_name,
        default="static/img/inc_emblems/incubator_example_emblem.png",
    )
    incubator_name = models.CharField(max_length=200, blank=True)
    country = models.CharField(max_length=200, blank=True)
    city = models.CharField(max_length=200, blank=True)
    industry_sector = models.TextField(max_length=100, blank=True)
    description = models.TextField(max_length=1000, blank=True)

class UniversityProfile(models.Model):
    user = models.OneToOneField(CustomUser, on_delete=models.CASCADE)
    emblem = models.FileField(
        upload_to=convert_emblem_name,
        default="static/img/uni_emblems/univeristy_example_emblem.png",
    )
    university_name_full = models.CharField(max_length=200, blank=True)
    university_name_short = models.CharField(max_length=200, blank=True)
    country = models.TextField(max_length=100, blank=True)
    linkedin = models.URLField(max_length=200, blank=True)

class UniversityDomains(models.Model):
    domain = models.CharField(max_length=100)
    university = models.ForeignKey(UniversityProfile, on_delete=models.CASCADE)

class StartupProfile(models.Model):
    user = models.OneToOneField(CustomUser, on_delete=models.CASCADE)
    emblem = models.FileField(
        upload_to=convert_emblem_name,
        default="static/img/startup_emblems/startup_example_emblem.png",
    )

    startup_name = models.CharField(max_length=200, blank=True)
    country = models.CharField(max_length=200, blank=True)
    city = models.TextField(max_length=100, blank=True)
    industry_sector = models.TextField(max_length=200, blank=True)
    description = models.TextField(max_length=1000, blank=True)

```



```

class Startup_Supervisor(models.Model):
    class Status(models.TextChoices):
        waiting = "W", "Waiting"
        approved = "A", "Approved"
        discard = "D", "Discard"

    incubator = models.ForeignKey(IncubatorProfile, on_delete=models.CASCADE)
    startup = models.OneToOneField(StartupProfile, on_delete=models.CASCADE)
    status = models.CharField(max_length=1, choices=Status.choices, default="W")
    is_admin = models.BooleanField(default=False)

    def change_status(self, status):
        if status == "A":
            self.status = Startup_Supervisor.Status.approved
            self.save()
        elif status == "D":
            self.status = Startup_Supervisor.Status.discard
            self.save()
        else:
            self.status = Startup_Supervisor.Status.waiting
            self.save()

    def change_admin(self):
        self.is_admin = not self.is_admin
        self.save()

class JobOffer(models.Model):
    class JobType(models.TextChoices):
        remote = "R", "Remote"
        office = "O", "Office"
        mixed = "M", "Mixed"

    class Salary(models.TextChoices):
        paid = "Y", "Paid"
        not_paid = "N", "No salary"

    startup = models.ForeignKey(StartupProfile, on_delete=models.CASCADE)
    offer_name = models.CharField(max_length=200, blank=True)
    description = models.TextField(max_length=1000, blank=True)
    country = models.CharField(max_length=200, blank=True)
    city = models.TextField(max_length=100, blank=True)
    availability_offering_from = models.DateField()
    availability_offering_to = models.DateField()
    job_period_from = models.FloatField(blank=True, null=True, default=0)
    job_period_to = models.FloatField(blank=True, null=True, default=0)
    paid = models.CharField(
        max_length=1, choices=Salary.choices, null=True, default="N"
    )
    job_type = models.CharField(
        max_length=3, choices=JobType.choices, null=True, default="O"
    )
    languages = models.TextField(max_length=500, blank=True, default="[]")
    skills = models.TextField(max_length=500, blank=True)
    responsibilities = models.TextField(max_length=500, blank=True, default="")
    benefits = models.TextField(max_length=500, blank=True, default="")

```



```

active = models.BooleanField(default=False)

class JobOfferDocuments(models.Model):
    document = models.CharField(max_length=100)
    job_offer = models.ForeignKey(JobOffer, on_delete=models.CASCADE)

class JobOfferStudentDocuments(models.Model):
    student = models.ForeignKey(StudentProfile, on_delete=models.CASCADE)
    offer = models.ForeignKey(JobOffer, on_delete=models.CASCADE)
    name_of_file = models.CharField(max_length=100)
    file = models.FileField(max_length=100, upload_to=convert_document_name)

class RecruitmentStatus(models.Model):
    class OfferStatus(models.TextChoices):
        new = "N", "New"
        rejected = "R", "Rejected"
        accepted = "A", "Accepted"

    student = models.ForeignKey(StudentProfile, on_delete=models.CASCADE)
    job_offer = models.ForeignKey(JobOffer, on_delete=models.CASCADE)
    comment = models.TextField(max_length=500, default="None", blank=True)
    overlapping_skills = models.IntegerField(default=0)
    rating = models.IntegerField(default=0)
    status = models.CharField(
        max_length=1, choices=OfferStatus.choices, null=True, default="N"
    )

class OfferKeyWordsLog(models.Model):
    student = models.ForeignKey(StudentProfile, on_delete=models.CASCADE)
    key_words = models.TextField(max_length=500, blank=True, default="[]")
    created = models.DateTimeField(auto_now_add=True)

```

13. queries.py

```

def get_isced_records():

def generate_ems_i_token():

def get_student_offers(obj):

def get_student_langauges(obj):

def get_student_skills(obj):

def get_offer_skills(pk):

```



```

def get_custom_used_id_for_student(id):

def get_student_area_of_studies(obj):

def get_university_domains(obj):

def get_new_startups_for_incubator(obj):

def get_managed_by_incubator_startups(obj):

def get_common_skills(a, b):

def calc_ratio_common_skills(student_skills, offer_skills):

def get_job_offer(offer_pk):

def get_documents_by_offer(offer):

def get_documents_by_student(student):

def get_student_vue_user_obj(obj, add_info=True):

```

14. urls.py

```

forget_password = [
    path(
        "password-reset/",
        PasswordResetView.as_view(
            template_name="accounts/form_password_reset.html",
            email_template_name="accounts/template_password_reset.html",
            from_email="ctipl_all@cti.p.lodz.pl",
            html_email_template_name="accounts/template_password_reset.html",
            success_url="done",
        ),
        name="password_reset",
    ),
    path("password-reset/done/", views.password_done_view,
name="password_reset_done"),
    path(
        "password-reset-confirm/<uidb64>/<token>/",
        PasswordResetConfirmView.as_view(
            template_name="accounts/form_password_reset_confirm.html",
            success_url=reverse_lazy("power:password_reset_complete"),
        ),
    ),

```



```

        name="password_reset_confirm",
    ),
    path(
        "password-reset-complete/",
        views.password_complete_view,
        name="password_reset_complete",
    ),
]

accounts_manage = [
    path("register/", views.register_view, name="register"),
    path("login/", views.login_view, name="login"),
    path("logout/", views.user_logout, name="logout"),
    path(
        "activate/<slug:uidb64>/<slug:token>",
        views.activate_account_view,
        name="activate",
    ),
]

student_account = [
    path("student_account/", views.student_account, name="student_account"),
    path(
        "student/apply_log/",
        TemplateView.as_view(template_name="incubator/apply_log.html"),
        name="student_apply_log",
    ),
]

university_account = [
    path("university/account/", views.university_account,
name="university_account",),
    path("university/join/", views.univeristy_apply, name="university_join",),
    path(
        "university/invite/",
        TemplateView.as_view(template_name="university/university_invite.html"),
        name="university_invite",
    ),
]

startup_account = [
    path("startup/account/", views.startup_account, name="startup_account",),
]

incubator_account = [
    path("incubator/account/", views.incubator_account,
name="incubator_account",),
    path(
        "incubator/invite/",
        TemplateView.as_view(template_name="incubator/invitation.html"),
        name="incubator_invite_link",
    ),
]

offer = [
    path("offer/add/", views.offer_add, name="offer_add",),
    path("offer/edit/<int:pk>/", views.offer_edit, name="offer_edit",),
    path("offer/preview/<int:pk>/", views.offer_preview, name="offer_preview",),
    path("offer/list/<int:page>/", views.offers_list, name="offers_list",),
]

```



```

    path("offer/search/", views.offer_search, name="offer_search"),
]
statistics = [
    path(
        "statistics/stats",
        TemplateView.as_view(template_name="statistics/statistics.html"),
        name="statistic",
    ),
]
misc = [
    path("misc/404/", TemplateView.as_view(template_name="misc/404.html"),
name="404",),
]
urlpatterns = (
    [
        path("", TemplateView.as_view(template_name="index.html"),
name="index",),
        path(
            "contact/",
            TemplateView.as_view(template_name="contact.html"),
            name="contact",
        ),
    ]
    + accounts_manage
    + forget_password
    + student_account
    + university_account
    + startup_account
    + incubator_account
    + static(settings.MEDIA_URL, document_root=settings.MEDIA_ROOT)
    + offer
    + statistics
    + misc
)

```

15. views.py

```

def password_done_view(request):

def password_complete_view(request):

@login_required
def user_logout(request):

def login_view(request):

def register_view(request):

def activate_account_view(request, uidb64, token):

```



```

@login_required
def student_account(request, template_name="student/student_account.html"):

def univeristy_apply(request):

@login_required
def
                                university_account(request,
template_name="university/university_account.html"):

def univeristy_apply(request):

@login_required
def incubator_account(request, template_name="incubator/incubator_account.html"):

@login_required
def startup_account(request, template_name="incubator/startup_account.html"):

@login_required
def offer_add(request, template_name="offer/offer_add.html"):

@login_required
def offer_edit(request, pk, template_name="offer/offer_edit.html"):

# nie wymaga logowania @login_required
def offers_list(request, page, template_name="offer/offers_list.html"):

@login_required
def offer_preview(request, pk, template_name="offer/offer_preview.html"):

```

6. Directory /templates

16. startup_account.html

```

{% extends 'base.html' %}
{% load static %}

{% block content %}

<div class="power-header-card">
  <div class="card-body">
    <i class="fas d-block fa-rocket fa-5x mb-4 textprimary"></i>
    <h2 class="font-weight-bold">Startup profile</h2>
  </div>
</div>

<div class="power-error-card">
  <div class="row">
    {% if password_form.errors %}

```



```

        <div class="col-md-4 order-md-2">
            <h4 class="d-flex justify-content-between mb-3"> <span class="text-
muted"></i><b>Messages</b></span>
                <span class="badge badge-secondary badge-pill">
                    <i class="fas fa-address-card textpprimary"></i>
                        {{ password_form.errors|length }} </span> </h4>
                <ul class="list-group">
                    {% for field in password_form %}
                    {% for error in field.errors %}
                    <li class="list-group-item d-flex justify-content-between bg-light">
                        <div class="text-warning">
                            <div class="row">
                                <div class="col-md-2 col-sm-2">
                                    <i class="fa fa-exclamation-triangle warning-color d-block" aria-
hidden="true"></i>
                                </div>
                                <div class="col-md-10 col-sm-10">
                                    <h6 class="my-0 warning-color d-block"><b>{{ error|escape }}</b></h6>
                                </div>
                            </div>
                        </li>
                    {% endfor %}
                    </ul>
                </div>
            {% endif %}
        </div>

<div class="power-content-card">
    <div class="card-body">
        <div class="row">
            <div class="d-none d-md-block col-md-6 custom-border-right">
                <div class="d-flex justify-content-center align-items-center mx-auto power-thumb">
                    
                </div>
            </div>

            <div class="col-md-6 custom-border-right">
                <div class="row row-flex d-flex d-md-none">
                    <div class="col-3 my-2">
                        <div class="d-flex justify-content-center align-items-center mx-auto power-
thumb">
                            
                        </div>
                    </div>
                    <div class="col-9">
                        <div class="d-flex justify-content-center align-items-center mx-auto h-100">
                            <div>
                                <h5 class="text-center font-weight-bold">
                                    {% if add_info.startup_name != '' %}
                                    {{ add_info.startup_name }}
                                    {% else %}
                                    <span class="text-danger">
                                        < Please set up name startup>
                                    </span>
                                    {%endif%}
                                </h5>
                            </div>
                        </div>
                    </div>
                </div>
                <h3 class="d-none d-md-flex font-weight-bold">
                    {% if add_info.startup_name != '' %}
                    {{ add_info.startup_name }}
                    {% else %}
                    <span class="text-danger">
                        < Please set up name startup>
                    </span>
                    {%endif%}
                </h3>
                <hr>

```



```

<p><b>Industry Sector:</b>
  {% if add_info.industry_sector != '' %}
  {{ add_info.industry_sector }}
  {% else %}
  <span class="text-danger">Please fill up this field</span>
  {%endif%}
</p>
<p><b>Affiliation to Incubator:</b>
  {% if status.get_status_display == "Discard" %}
  none
  {% else %}
  {{affiliated_incubator}}
  {% endif %}
</p>
<p><b>Country:</b>
  {% if add_info.country != '' %}
  {% load countries %}
  {% get_country add_info.country as countcode %}
  <span class="power-chip-country">
    
  {% else %}
  <span class="text-danger"><i class="far fa-flag mr-2"></i>No Country</span>
  {%endif%}
</p>
<p><b>City:</b>
  {% if add_info.city != '' %}
  {{ add_info.city }}
  {% else %}
  <span class="text-danger">Please fill up this field</span>
  {%endif%}</p>
</div>
</div>
<div class="row">
  <div class="col-12">
    <hr>
    <h6><b>Startup Description:</b></h6>
    <div id="startup_viewer_description" class="card-text" date-desc="{{
add_info.description }}"></div>
  </div>
</div>
</div>
</div>
<div class="power-content-card">
  <div class="card-body">
    <div class="row">
      <div class="col-6 d-flex align-items-end">
        <form method="post" class="card-text w-100">
          {% csrf_token %}
          {% if edit_status == "edit_info" %}
          <input name="edit_status" type="hidden" value="edit_close">
          <button id="singlebutton_info" name="singlebutton" class="btn btn-secondary btn-
lg btn-block">Hide
            Edit</button>
          {% else %}
          <input name="edit_status" type="hidden" value="edit_info">
          <button id="singlebutton_info" name="singlebutton" class="btn primary-button btn-
lg btn-block">Edit
            Info</button>
          {% endif %}
        </form>
      </div>
      <div class="col-6 d-flex align-items-end">
        <form method="post" class="card-text w-100">
          {% csrf_token %}
          {% if edit_status == "edit_manager" %}
          <input name="edit_status" type="hidden" value="edit_close">
          <button id="singlebutton_manager" name="singlebutton"
            class="btn btn-secondary btn-lg btn-block">Hide Edit</button>
          {% else %}

```




```

        </div>
    </div>
</div>

<div class="power-content-card" id="validate_form_startup_info">
    <div class="card-body">
        <form method="post" class="card-text w-100">
            {% csrf_token %}
            <input name="edit_type" type="hidden" value="startup_info">
            <input name="edit_status" type="hidden" value="{{ edit_status }}">
            <div class="row">
                <div class="col-md-6 custom-border-right">
                    <div class="my-3"> <label>Startup Name</label>
                    <div class="input-group">
                        <div class="input-group-prepend"> <span class="input-group-text"><i
                            class="fa fa-user-tie"></i></span>
                        </div>
                        <input required type="text" class="form-control" name="startup_name"
                            value="{{ add_info.startup_name }}" v-model="startup_name"
                            v-bind:class="{ 'is-invalid': missingStartupName, 'is-valid':
!missingStartupName }">
                        <div class="invalid-feedback">Please fill up this field.</div>
                        <div class="valid-feedback">Looks ok !</div>
                    </div>
                    <div class="my-3"> <label>Industry Sector</label>
                    <div class="input-group">
                        <div class="input-group-prepend"> <span class="input-group-text"><i
                            class="fa fa-university"></i></span>
                        </div>
                        <input type="text" class="form-control" name="industry_sector"
                            value="{{ add_info.industry_sector }}" v-model="industry_sector"
                            v-bind:class="{ 'is-invalid': missingIndustrySector, 'is-valid':
!missingIndustrySector }">
                        <div class="invalid-feedback">Please fill up this field.</div>
                        <div class="valid-feedback">Looks ok !</div>
                    </div>
                </div>
                <div class="col-md-6">
                    <div class="my-3"> <label>Country</label>
                    <div class="input-group">
                        <div class="input-group-prepend">
                            <span class="input-group-text">
                                <i v-if="missingCountry" class="fa fa-flag"></i>
                                
                            </span>
                        </div>
                        {% load countries %}
                        {% get_countries as countries %}
                        <select class="form-control"
                            v-bind:class="{ 'is-invalid': missingCountry, 'is-valid':
!missingCountry }" id="country"
                            name="country" v-model="country" @change="selectCountry()">
                            <option value="{{ country.name }}">Select country</option>
                            {% for country in countries %}
                            <option value="{{ country.code }}"
                                {% if country.name == add_info.country %}selected{% endif %}>
                                {{ country.name }}</option>
                            {% endfor %}
                        </select>
                        <div class="invalid-feedback">This field is required, please fill field
                        </div>
                        <div class="valid-feedback">Looks good!</div>
                    </div>
                    <div class="my-3"> <label>City</label>
                    <div class="input-group">
                        <div class="input-group-prepend"> <span class="input-group-text"><i
                            class="fa fa-university"></i></span>
                        </div>
                        <input
                            type="text" class="form-control" name="city" value="{{
add_info.city }}"

```



```

        v-model="city" v-bind:class="{ 'is-invalid': missingCity, 'is-valid':
!missingCity }">
        <div class="invalid-feedback">Please fill up this field.</div>
        <div class="valid-feedback">Looks ok !</div>
        </div>
      </div>
    </div>
    <div class="row">
      <div class="col-md-12 d-flex align-items-end custom-border-top">
        <button class="btn primary-button btn-lg btn-block">Update info</button>
      </div>
    </div>
  </form>
</div>
</div>
</div>
<div class="power-content-card">
  <div class="card-body">
    <div class="row">
      <div class="col-md-12" id="toastui_textarea">
        <label for="startupbriefdescr">Startup Description (max 500 characters)</label>
        <div id="startup_editor_description"></div>
        <form method="post" class="card-text">
          {% csrf_token %}
          <input name="edit_type" type="hidden" value="startup_description">
          <input name="edit_status" type="hidden" value="{{ edit_status }}">
          <div class="form-group">
            <textarea class="form-control invisible" value="{{ add_info.description }}"
              v-model="description" name="description"
              v-bind:class="{ 'is-invalid': missingDescription, 'is-valid':
!missingDescription }"
              style="height: 0px;" id="textarea_description"></textarea>
            <small :class="{ 'text-danger': remaining==0}">[[instruction]]</small>
            <div class="invalid-feedback">Please fill description.</div>
            <div class="valid-feedback">Looks ok !</div>
          </div>
          <button name="singlebutton" class="btn primary-button btn-lg btn-
block">Update</button>
        </form>
      </div>
    </div>
  </div>
</div>
</div>
{% endif %}

{% if edit_status == "edit_manager" %}
<div class="power-content-card">
  <div class="card-body">
    <div class="row">
      <div class="col-md-6 custom-border-right">
        <h4 class=" mb-3 card-title"><b>Manager info</b></h4>
        <form method="post" class="card-text">
          {% csrf_token %}
          <input name="edit_type" type="hidden" value="startup_manager">
          <input name="edit_status" type="hidden" value="{{ edit_status }}">
          <div class="my-3"> <label>First name</label>
          <div class="input-group">
            <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-user"></i></span>
            </div>
            <input type="text" class="form-control" value="{{ user.first_name }}"
name="first_name">
          </div>
        </div>
        <div class="my-3"> <label>Last name</label>
        <div class="input-group">
          <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-user"></i></span>
          </div>
          <input type="text" class="form-control" value="{{ user.last_name }}"
name="last_name">
        </div>
      </div>
    </div>
  </div>
</div>

```



```

                <div class="my-3"> <label>Username</label>
                <div class="input-group">
                    <div class="input-group-prepend"> <span class="input-group-text"><i
                        class="fas fa-at"></i></span>
                    </div>
                    <input required type="text" class="form-control" value="{{ user.email }}"
name="email">
                </div>
            </div>
            <button id="singlebutton" name="singlebutton" class="btn primary-button btn-lg btn-
block">Update
                info</button>
            </form>
        </div>
        <div class="col-md-6 d-flex align-items-end custom-border-top">
            <form method="post" class="card-text w-100">
                {% csrf_token %}
                <input name="edit_type" type="hidden" value="startup_password">
                <input name="edit_status" type="hidden" value="{{ edit_status }}">
                <div class="my-3"> <label>Current password</label>
                <div class="input-group">
                    <div class="input-group-prepend"> <span class="input-group-text"><i
                        class="fa fa-lock"></i></span>
                    </div>
                    <input
placeholder="Password"
                        required
                        type="password"
                        class="form-control"
                        name="old_password">
                </div>
            </div>
            <div class="my-3"> <label>New password</label>
            <div class="input-group">
                <div class="input-group-prepend"> <span class="input-group-text"><i
                    class="fa fa-lock"></i></span>
                </div>
                <input
placeholder="Password"
                    required
                    type="password"
                    class="form-control"
                    name="new_password1">
            </div>
            <div class="my-3"> <label>Confirm new password</label>
            <div class="input-group">
                <div class="input-group-prepend"> <span class="input-group-text"><i
                    class="fa fa-lock"></i></span>
                </div>
                <input required type="password" class="form-control" placeholder="Confirm
password"
                    name="new_password2">
            </div>
            </div>
            <button id="singlebutton_password" name="singlebutton"
                class="btn primary-button btn-lg btn-block">Update password</button>
        </form>
    </div>
</div>
{% endif %}

{% endblock content %}

{% block extra_js %}

{% if vue_user_obj %}
<script type='text/javascript'>
    var user_obj = {{ vue_user_obj | safe }}
</script>
{% endif %}

<script src="https://cdn.jsdelivr.net/npm/lodash@4.13.1/lodash.min.js"></script>
<script src="{% static 'js/components/create_toastui_editor.js' %}"></script>

```



```

<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/codemirror/5.48.4/codemirror.min.css" type="text/css" />
<link rel="stylesheet" href="https://uicdn.toast.com/editor/2.5.2/toastui-editor.min.css" type="text/css" />
<script src="https://uicdn.toast.com/editor/2.5.2/toastui-editor-all.min.js"></script>
{% if edit_status == "edit_info" %}
<script src="{% static 'js/components/account_form_validator_startup.js' %}"></script>
{% endif %}
<script>
    createViewer("#startup_viewer_description", "200px", $("#startup_viewer_description").attr("date-desc"))
</script>

{% endblock extra_js %}

```

17. incubator_account.html

```

{% extends 'base.html' %}
{% load static %}

{% block content %}

<div class="power-header-card">
    <div class="card-body">
        <i class="fas fa-chart-line fa-5x mb-4 textprimary"></i>
        <h2 class="font-weight-bold">Incubator account</h2>
    </div>
</div>

<div class="power-error-card">
    <div class="row">
        {% if form.errors %}
        <div class="col-12">
            <h4 class="d-flex justify-content-between mb-3"> <span class="text-danger"></span><b>Messages</b></span>
            <span class="badge badge-danger badge-pill"> <i class="fas fa-address-card"> </i>
                {{ form.errors|length }} </span> </h4>
            <ul class="list-group">
                {% for field in form %}
                {% for error in field.errors %}
                <li class="list-group-item d-flex justify-content-between bg-light">
                    <div class="row w-100 text-left">
                        <div class="col-2 col-md-1 text-center">
                            <i class="fa fa-exclamation-triangle text-danger d-block" aria-hidden="true"></i>
                        </div>
                        <div class="col-10 col-md-11 text-left">
                            <h6 class="my-0 text-danger d-block"><b>{{ error|escape }}</b></h6>
                        </div>
                    </li>
                {% endfor %}
                {% endfor %}
            </ul>
        </div>
        {% endif %}
    </div>
</div>

<div class="power-content-card">
    <div class="card-body">
        <div class="row">
            <div class="d-none d-md-block col-md-6 custom-border-right">
                <div class="d-flex justify-content-center align-items-center mx-auto power-thumb">
                    
                </div>
            </div>

            <div class="col-md-6">
                <div class="row row-flex d-flex d-md-none">
                    <div class="col-3 my-2">

```



```

thumb">
        <div class="d-flex justify-content-center align-items-center mx-auto power-
        
        </div>
    </div>
    <div class="col-9">
        <div class="d-flex justify-content-center align-items-center mx-auto h-100">
            <div>
                <h5 class="text-center font-weight-bold">
                    {% if add_info.incubator_name != '' %}
                    {{ add_info.incubator_name }}
                    {% else %}
                    <span class="text-danger">
                        < Please set up name incubator>
                    </span>
                    {%endif%}
                </h5>
            </div>
        </div>
    </div>
</div>
<h3 class="d-none d-md-flex font-weight-bold">
    {% if add_info.incubator_name != '' %}
    {{ add_info.incubator_name }}
    {% else %}
    <span class="text-danger">
        < Please set up name incubator>
    </span>
    {%endif%}
</h3>
<hr>

<p><b>Industry Sector:</b>
    {% if add_info.industry_sector != '' %}
    {{ add_info.industry_sector }}
    {% else %}
    <span class="text-danger">Please fill up this field</span>
    {%endif%}
</p>

<p><b>Country:</b>
    {% if add_info.country != '' %}
    {% load countries %}
    {% get_country add_info.country as countcode %}
    <span class="power-chip-country">
        
            {{countcode.name}}</span>
    {% else %}
    <span class="text-danger"><i class="far fa-flag mr-2"></i>No Country</span>
    {%endif%}
</p>

<p><b>City:</b>
    {% if add_info.city != '' %}
    {{ add_info.city }}
    {% else %}
    <span class="text-danger">Please fill up this field</span>
    {%endif%}</p>
</div>
</div>
<div class="row">
    <div class="col-12">
        <hr>
        <h6><b>Incubator Description:</b></h6>
        {% if add_info.description != '' %}
        <div id="incubator_viewer_description" class="card-text" date-desc="{{
add_info.description }}"></div>
        {% else %}
        <span class="text-danger">Please fill up description</span>
        {%endif%}
    </div>
</div>
</div>

```



```

</div>

<div class="power-content-card">
  <div class="card-body">
    <div class="row">
      <div class="col-6 d-flex align-items-end">
        <form method="post" class="card-text w-100">
          {% csrf_token %}
          {% if edit_status == "edit_info" %}
          <input name="edit_status" type="hidden" value="edit_close">
          <button id="singlebutton_info" name="singlebutton" class="btn btn-secondary btn-
lg btn-block">Hide
            Edit</button>
          {% else %}
          <input name="edit_status" type="hidden" value="edit_info">
          <button id="singlebutton_info" name="singlebutton" class="btn primary-button btn-
lg btn-block">Edit
            Info</button>
          {% endif %}
        </form>
      </div>
      <div class="col-6 d-flex align-items-end">
        <form method="post" class="card-text w-100">
          {% csrf_token %}
          {% if edit_status == "edit_manager" %}
          <input name="edit_status" type="hidden" value="edit_close">
          <button id="singlebutton_manager" name="singlebutton"
            class="btn btn-secondary btn-lg btn-block">Hide Edit</button>
          {% else %}
          <input name="edit_status" type="hidden" value="edit_manager">
          <button id="singlebutton_manager" name="singlebutton"
            class="btn primary-button btn-lg btn-block">Edit Manager</button>
          {% endif %}
        </form>
      </div>
    </div>
  </div>
</div>

{% if edit_status == "edit_info" %}
<div class="power-content-card">
  <div class="card-body">
    <div id="validate_form_incubator">
      <div class="row">
        <div class="col-md-6 custom-border-right">
          <form method="post" action="{% url 'power:incubator_account' %}"
enctype="multipart/form-data"
            class="card-text mr-0 pr-0 w-100">
            {% csrf_token %}
            <input name="edit_type" type="hidden" value="incubator_emblem">
            <input name="edit_status" type="hidden" value="{{ edit_status }}">
            <div class="my-3"> <label>Incubator Emblem</label>
              <div class="input-group">
                <div class="input-group-prepend">
                  <span class="input-group-text" id="inputGroupFileAddon01"><i
                    class="fa fa-university"></i></span>
                </div>
                <div class="custom-file">
                  <input type="file" class="custom-file-input" name="image"
                    aria-describedby="inputGroupFileAddon01"
@change="filesSelected">
                  <label class="custom-file-label" for="inputGroupFile01"
                    v-if="!files || !files.length">Choose
                    file</label>
                  <label class="custom-file-label" for="inputGroupFile01" v-
for="file in files"
                    :key="file.name"> [[ file.name ]]</label>
                </div>
              </div>
            </div>
            <button id="singlebutton_add_info" class="btn primary-button btn-lg btn-
block">Update emblem
          </button>
        </div>
      </div>
    </div>
  </div>
</div>

```



```

        </form>
    </div>
</div>
<form method="post" class="card-text w-100">
    {% csrf_token %}
    <input name="edit_type" type="hidden" value="incubator_info">
    <input name="edit_status" type="hidden" value="{{ edit_status }}">
    <div class="row">
        <div class="col-md-6 custom-border-top custom-border-right">
            <div class="my-3"> <label>Incubator Name</label>
            <div class="input-group">
                <div class="input-group-prepend"> <span class="input-group-text"><i
                    class="fa fa-user-tie"></i></span>
                </div>
                <input type="text" class="form-control" placeholder="
name="incubator_name"
                    value="{{ add_info.incubator_name }}" v-model="incubator_name"
                    v-bind:class="{ 'is-invalid': missingIncubatorName, 'is-valid':
!missingIncubatorName }">
                <div class="invalid-feedback">Please fill up this field.</div>
                <div class="valid-feedback">Looks ok !</div>
            </div>
        </div>
        <div class="my-3"> <label>Main Industry Sector</label>
        <div class="input-group">
            <div class="input-group-prepend"> <span class="input-group-text"><i
                class="fa fa-university"></i></span>
            </div>
            <input type="text" class="form-control" placeholder="
name="industry_sector"
                value="{{ add_info.industry_sector }}" v-model="industry_sector"
                v-bind:class="{ 'is-invalid': missingIndustrySector, 'is-valid':
!missingIndustrySector }">
            <div class="invalid-feedback">Please fill up this field.</div>
            <div class="valid-feedback">Looks ok !</div>
        </div>
    </div>
    <div class="col-md-6 custom-border-top">
        <div class="my-3"> <label>Country</label>
        <div class="input-group">
            {% load countries %}
            {% get_countries as countries %}
            <div class="input-group-prepend">
                <span class="input-group-text">
                    <i v-if="missingCountry" class="fa fa-flag"></i>
                    
                </span>
            </div>
            <select class="form-control" @change="selectCountry()"
                v-bind:class="{ 'is-invalid': missingCountry, 'is-valid':
!missingCountry}"
                id="country" name="country" v-model="country">
                <option value="{{ country.name }}">Select country</option>
                {% for country in countries %}
                <option value="{{ country.code }}"
                    {% if country.name == add_info.country %}selected{% endif %}>
                    {{ country.name }}</option>
                {% endfor %}
            </select>
            <div class="invalid-feedback">This field is required, please fill field
            </div>
            <div class="valid-feedback">Looks good!</div>
        </div>
        <div class="my-3"> <label>City</label>
        <div class="input-group">
            <div class="input-group-prepend"> <span class="input-group-text"><i
                class="fa fa-university"></i></span>
            </div>
            <input type="text" class="form-control" placeholder="" name="city"
                value="{{ add_info.city }}" v-model="city"
                v-bind:class="{ 'is-invalid': missingCity, 'is-valid':
!missingCity }">

```



```

        <div class="invalid-feedback">Please fill up this field.</div>
        <div class="valid-feedback">Looks ok !</div>
      </div>
    </div>
  </div>
</div>
<div class="row">
  <div class="col-12">
    <button class="btn primary-button btn-lg btn-block">Update info</button>
  </div>
</div>
</form>
</div>
<div class="row">
  <div class="col-md-12" id="toastui_textarea">
    <label class="my-3" for="startupbriefdescr">Incubator Description (max 500
characters)</label>
    <div id="incubator_editor_description"></div>
    <form method="post" class="card-text">
      {% csrf_token %}
      <input name="edit_type" type="hidden" value="incubator_description">
      <input name="edit_status" type="hidden" value="{{ edit_status }}">
      <div class="form-group">
        <textarea class="form-control invisible" value="{{ add_info.description }}"
v-model="description" name="description"
v-bind:class="{ 'is-invalid': missingDescription, 'is-valid':
!missingDescription }"
style="height: 0px;" id="textarea_description"></textarea>
<small :class="{ 'text-danger': remaining==0}">[[instruction]]</small>
<div class="invalid-feedback">Please fill description.</div>
<div class="valid-feedback">Looks ok !</div>
      </div>
      <button name="singlebutton" class="btn primary-button btn-lg btn-block
">Update</button>
    </form>
  </div>
</div>
</div>
{% endif %}

{% if edit_status == "edit_manager" %}
<div class="power-content-card">
  <div class="card-body">
    <div class="row">
      <div class="col-md-6 custom-border-right">
        <h5 class="mb-3 card-title"><b>Manager info</b></h5>
        <form method="post" class="card-text">
          {% csrf_token %}
          <input name="edit_type" type="hidden" value="incubator_manager">
          <input name="edit_status" type="hidden" value="{{ edit_status }}">
          <div class="my-3"> <label>First name</label>
          <div class="input-group">
            <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-user"></i></span>
            </div>
            <input required type="text" class="form-control" value="{{
user.first_name }}"
name="first_name">
          </div>
        </div>
        <div class="my-3"> <label>Last name</label>
        <div class="input-group">
          <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-user"></i></span>
          </div>
          <input required type="text" class="form-control" value="{{
user.last_name }}"
name="last_name">
        </div>
      </div>
      <div class="my-3"> <label>Username</label>
      <div class="input-group">
        <div class="input-group-prepend"> <span class="input-group-text"><i

```



```

                class="fas fa-at"></i></span>
            </div>
            <input required type="text" class="form-control" value="{{ user.email }}"
name="email">
        </div>
    </div>
    <button id="singlebutton" name="singlebutton" class="btn primary-button btn-lg btn-
block">Update
        info</button>
    </form>
</div>

<div class="col-md-6 d-flex align-items-end custom-border-top">
    <form method="post" class="card-text w-100">
        {% csrf_token %}
        <input name="edit_type" type="hidden" value="incubator_password">
        <input name="edit_status" type="hidden" value="{{ edit_status }}">
        <div class="my-3"> <label>Current password</label>
            <div class="input-group">
                <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-lock"></i></span>
                </div>
                <input required type="password" class="form-control"
placeholder="Password"
                    name="old_password">
            </div>
        </div>
        <div class="my-3"> <label>New password</label>
            <div class="input-group">
                <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-lock"></i></span>
                </div>
                <input required type="password" class="form-control"
placeholder="Password"
                    name="new_password1">
            </div>
        </div>
        <div class="my-3"> <label>Confirm new password</label>
            <div class="input-group">
                <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-lock"></i></span>
                </div>
                <input required type="password" class="form-control" placeholder="Confirm
password"
                    name="new_password2">
            </div>
        </div>
        <button name="singlebutton" class="btn primary-button btn-lg btn-block">Update
password</button>
    </form>
</div>
</div>
</div>
{% endif %}

{% if not edit_status or edit_status == "edit_close" %}
<div class="power-content-card">
    <div class="card-body">
        <h4><b>List of startups</b></h4></b></h4>
        <p class="font-weight-bold">Startups for which you are support</p>
        <div class="row my-1 d-none d-sm-flex">
            <div class="col-sm-1 my-1 d-flex align-items-center justify-content-center">
                <b>#</b>
            </div>
            <div class="col-sm-3 my-1 d-flex align-items-center">
                <b>Startup name</b>
            </div>
            <div class="col-sm-2 my-1 d-flex align-items-center justify-content-center">
                <b>Self managed</b>
            </div>
            <div class="col-sm-3 my-1 d-flex align-items-center justify-content-center">
                <b>Profile</b>
            </div>
        </div>
    </div>
</div>

```



```

        </div>
        <div class="col-sm-3 my-1 d-flex align-items-center justify-content-center">
            <b>Offers list</b>
        </div>
    </div>

    {% for item in managed_startups %}
    <div class="row my-1" style="border-top: solid 1px lightgrey;">
        <div class="col-2 col-sm-1 my-1 d-flex align-items-center justify-content-center">
            {{ forloop.counter }}
        </div>
        <div class="col-8 col-sm-3 my-1 d-flex align-items-center">
            {{ item.startup__startup_name }} {% if item.is_admin %} (self managed) {% endif %}
        </div>
        <div class="col-2 col-sm-2 my-1 d-flex align-items-center justify-content-center text-
center">
            <div class="custom-control custom-switch">
                <a href="{% url 'power:incubator_account' %}?id={{ item.startup_id }}&admin=True "
                    class="btn primary-button btn-sm" role="button">
                    {% if item.is_admin %}
                    <i class="fas fa-user-times 2x"></i>
                    {% else %}
                    <i class="fas fa-user-tag"></i>
                    {% endif %}
                </a>
            </div>
        </div>
        <div class="col-6 col-sm-3 my-1 d-flex align-items-center justify-content-center">
            <a href="#" data-toggle="modal" data-target="#itemA{{ forloop.counter }}" class="btn
primary-button"
                role="button"><i class="far fa-lightbulb"></i></a>
        </div>
        <div class="col-6 col-sm-3 my-1 d-flex align-items-center justify-content-center">
            <a href="{% url 'power:offers_list' 1 %}" class="btn primary-button" role="button"><i
                class="fas fa-briefcase"></i></a></td>
        </div>
        <div>
            <!-- Modal -->
            <div class="modal fade" id="itemA{{ forloop.counter }}" data-backdrop="static"
tabindex="-1"
                role="dialog" aria-labelledby="staticBackdropLabel" aria-hidden="true">
                <div class="modal-dialog" role="document">
                    <div class="modal-content">
                        <div class="modal-header d-flex justify-content-center align-items-center
mx-auto w-100">
                            <div class="row w-100">
                                <div class="col-4 my-2">
                                    <div
mx-auto power-offer-thumb">
                                        class="d-flex justify-content-center align-items-center
offer-img-thumb">
                                            
                                        </div>
                                    </div>
                                <div class="col-8">
                                    <div class="d-flex justify-content-center align-items-center
mx-auto">
                                        <div>
                                            <h5 class="text-center font-weight-bold">
                                                {% if item.startup__startup_name %}
                                                {{ item.startup__startup_name }}
                                                {% else %}
                                                <span class="text-danger">Didn't specified</span>
                                                {%endif%}
                                            </h5>
                                        </div>
                                    </div>
                                </div>
                            </div>
                        </div>
                    </div>
                </div>
            </div>
        </div>
        <div class="modal-body w-100 justify-content-center align-items-center mx-
auto">
            <div class="row justify-content-center align-items-center mx-auto">

```




```

        {{ forloop.counter }}
      </div>
      <div class="col-8 col-sm-3 my-1 d-flex align-items-center">
        {{ item.startup__startup_name }}
      </div>
      <div class="col-2 col-sm-2 my-1 d-flex align-items-center justify-content-center">
        <a href="#" data-toggle="modal" data-target="#itemB{{ forloop.counter }}" class="btn
primary-button"
          role="button"><i class="far fa-lightbulb"></i></a>
      </div>
      <div class="col-6 col-sm-3 my-1 d-flex align-items-center justify-content-center">
        <a href="{% url 'power:incubator_account' %}?id={{ item.startup_id }}&status=A"
          class="btn primary-button btn-sm" role="button">Accept</a>
      </div>
      <div class="col-6 col-sm-3 my-1 d-flex align-items-center justify-content-center">
        <a href="{% url 'power:incubator_account' %}?id={{ item.startup_id }}&status=D"
          class="btn btn-danger btn-sm" role="button">Reject</a>
      </div>
      <div>
        <!-- Modal -->
        <div class="modal fade" id="itemB{{ forloop.counter }}" data-backdrop="static"
tabindex="-1"
          role="dialog" aria-labelledby="staticBackdropLabel" aria-hidden="true">
          <div class="modal-dialog" role="document">
            <div class="modal-content">
              <div class="modal-header d-flex justify-content-center align-items-center
mx-auto w-100">
                <div class="row w-100">
                  <div class="col-4 my-2">
                    <div
mx-auto power-offer-thumb">
                      class="d-flex justify-content-center align-items-center
power-offer-img-thumb">
                        
                      </div>
                    </div>
                  <div class="col-8">
                    <div class="d-flex justify-content-center align-items-center
mx-auto">
                      <div>
                        <h5 class="text-center font-weight-bold">
                          {% if item.startup__startup_name %}
                          {{ item.startup__startup_name }}
                          {% else %}
                          <span class="text-danger">Didn't specified</span>
                          {%endif%}
                        </h5>
                      </div>
                    </div>
                  </div>
                </div>
              </div>
            <div class="modal-body w-100 justify-content-center align-items-center mx-
auto">
              <div class="row justify-content-center align-items-center mx-auto">
                <div class="col-8 my-2">
                  <p><b>Industry Sector:</b>
                    {% if item.startup__industry_sector != '' %}
                    {{ item.startup__industry_sector }}
                    {% else %}
                    <span class="text-danger">Didn't specified</span>
                    {%endif%}
                  </p>
                  <p><b>Country:</b>
                    {% if item.startup__country != '' %}
                    {% load countries %}
                    {% get_country item.startup__country as countcode %}
                    <span class="power-chip-country">
                      
                      {{ countcode.name }}</span>
                    {% else %}

```




```

{% endif %}
{% endfor %}

{% for item in new_startups %}
{% if item.startup_description != '' %}
<script>
    createViewer("#startup_viewer_descriptionB{{ forloop.counter }}", "200px",
    $("#startup_viewer_descriptionB{{ forloop.counter }}").attr("date-desc"))
</script>
{% endif %}
{% endfor %}
{% endif %}

{% endblock extra_js %}

```

18. student_account.html

```

{% extends 'base.html' %}
{% load static %}
{% load i18n %}

{% block content %}

<div class="power-header-card">
    <div class="card-body">
        <i class="fas d-block fa-user-graduate fa-5x mb-4 textprimary"></i>
        <h2 class="font-weight-bold">Student account</h2>
    </div>
</div>

<div class="power-error-card">
    <div class="row">
        {% if form.errors %}
        <div class="col-12">
            <h4 class="d-flex justify-content-between mb-3">
                <span class="text-danger"></span><b>Messages</b></span>
                <span class="badge badge-danger badge-pill"> <i class="fas fa-address-card"> </i>
                    {{ form.errors|length }} </span> </h4>
            <ul class="list-group">
                {% for field in form %}
                {% for error in field.errors %}
                <li class="list-group-item d-flex justify-content-between bg-light">
                    <div class="row w-100 text-left">
                        <div class="col-2 col-md-1 text-center">
                            <i class="fa fa-exclamation-triangle text-danger d-block" aria-
                            hidden="true"></i>
                        </div>
                        <div class="col-10 col-md-11 text-left">
                            <h6 class="my-0 text-danger d-block"><b>{{ error|escape }}</b></h6>
                        </div>
                    </div>
                {% endfor %}
                {% endfor %}
            </ul>
        </div>
        {% endif %}
    </div>
</div>

<div class="power-content-card">
    <div class="card-body">
        {% include "student/student_profile_card.html" %}
    </div>
</div>

<div class="power-content-card">
    <div class="card-body">
        <div class="row">
            <div class="col-6 col-md-4 order-1 order-md-1 d-flex align-items-end">
                <form method="post" class="card-text w-100">

```



```

        {% csrf_token %}
        {% if edit_status == "edit_profile" %}
        <input name="edit_status" type="hidden" value="edit_close">
        <button id=" singlebutton_info" name="singlebutton" class="btn btn-secondary btn-
lg btn-block">Hide
            Edit</button>
        {% else %}
        <input name="edit_status" type="hidden" value="edit_profile">
        <button id=" singlebutton_profile" name="singlebutton"
            class="btn primary-button btn-lg btn-block">Edit
            Profile</button>
        {% endif %}
    </form>
</div>
<div class="col-12 col-md-4 order-3 order-md-2 mt-3 mt-md-0 d-flex align-items-end">
    <form method="post" class="card-text w-100">
        {% csrf_token %}
        {% if edit_status == "edit_skills" %}
        <input name="edit_status" type="hidden" value="edit_close">
        <button id=" singlebutton_manager" name="singlebutton"
            class="btn btn-secondary btn-lg btn-block">Hide
            Edit</button>
        {% else %}
        <input name="edit_status" type="hidden" value="edit_skills">
        <button id=" singlebutton_skills" name="singlebutton"
            class="btn primary-button btn-lg btn-block">Edit
            Skills</button>
        {% endif %}
    </form>
</div>
<div class="col-6 col-md-4 order-2 order-md-3 d-flex align-items-end">
    <form method="post" class="card-text w-100">
        {% csrf_token %}
        {% if edit_status == "edit_password" %}
        <input name="edit_status" type="hidden" value="edit_close">
        <button id=" singlebutton_info" name="singlebutton" class="btn btn-secondary btn-
lg btn-block">Hide
            Edit</button>
        {% else %}
        <input name="edit_status" type="hidden" value="edit_password">
        <button id=" singlebutton_password" name="singlebutton"
            class="btn primary-button btn-lg btn-block">Edit
            Password</button>
        {% endif %}
    </form>
</div>
</div>
</div>
</div>
{% if edit_status == "edit_password" %}
<div class="power-content-card">
    <div class="card-body">
        <h5 class="my-3 card-title"><b>Personal info and Password</b></h5>
        <div class="row">
            <div class="col-md-6 custom-border-right">
                <form method="post" class="card-text">
                    {% csrf_token %}
                    <input name="edit_type" type="hidden" value="student_name">
                    <input name="edit_status" type="hidden" value="{{ edit_status }}">
                    <div class="my-3"> <label>First name</label>
                        <div class="input-group">
                            <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-user"></i></span> </div>
                            <input
                                required
                                type="text"
                                class="form-control"
                                value="{{
user.first_name }}"
                                name="first_name">
                        </div>
                    </div>
                    <div class="my-3"> <label>Second name</label>
                        <div class="input-group">
                            <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-user"></i></span> </div>

```



```

        <input      required      type="text"      class="form-control"      value="{{
user.last_name}}}"
                name="last_name">
        </div>
    </div>
    <div class="my-3"> <label>Email</label>
    <div class="input-group">
        <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-user"></i></span> </div>
        <input type="text" class="form-control" value="{{ user.email }}"
readonly>
    </div>
    </div>
    <button id="singlebutton" name="singlebutton" class="btn primary-button btn-lg btn-
block">Update
        info</button>
    </form>
</div>
<div class="col-md-6">
    <form method="post" class="card-text">
        {% csrf_token %}
        <input name="edit_type" type="hidden" value="student_password">
        <input name="edit_status" type="hidden" value="{{ edit_status }}">
        <div class="my-3"> <label>Current password</label>
        <div class="input-group">
            <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-lock"></i></span> </div>
            <input      required      type="password"      class="form-control"
placeholder="Password"
                name="old_password">
        </div>
        </div>
        <div class="my-3"> <label>New password</label>
        <div class="input-group">
            <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-lock"></i></span> </div>
            <input      required      type="password"      class="form-control"
placeholder="Password"
                name="new_password1">
        </div>
        </div>
        <div class="my-3"> <label>Confirm new password</label>
        <div class="input-group">
            <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-lock"></i></span> </div>
            <input required type="password" class="form-control" placeholder="Confirm
password"
                name="new_password2">
        </div>
        </div>
        <button id="singlebutton_password" name="singlebutton"
class="btn primary-button btn-lg btn-block">Update password</button>
    </form>
</div>
</div>
</div>
{% endif %}

{% if edit_status == "edit_profile" %}
<div class="power-content-card">
    <div class="card-body">
        <h5 class="my-3 card-title"><b>Profile info</b></h5>
        <form method="post" class="card-text">
            {% csrf_token %}
            <input name="edit_type" type="hidden" value="student_info">
            <input name="email" type="hidden" value="{{ user.email }}">
            <input name="edit_status" type="hidden" value="{{ edit_status }}">
            <div class="row" id="validate_form_student">
                <div class="col-md-6">
                    <div class="my-3"> <label>Home institution </label>
                    <div class="input-group">
                        <div class="input-group-prepend"> <span class="input-group-text"><i
class="fa fa-university"></i></span> </div>

```



```

        <input type="text" class="form-control" name="home_institution"
            value="{{ add_info.home_institution }}" v-model="home_institution"
            v-bind:class="{ 'is-invalid': detectedHomeInstitution, 'is-valid':
!detectedHomeInstitution }"
            readonly>
        <div class="invalid-feedback">We cannot detect your university</div>
        <div class="valid-feedback">University detected correctly !</div>
    </div>
    <div class="my-3"> <label>Area of Studies</label>
    <div class="input-group">
        <div class="input-group-prepend"> <span class="input-group-text"><i
            class="fa fa-user-tie"></i></span> </div>
        <select required class="form-control" name="area_of_studies"
            v-bind:class="{ 'is-invalid': missingAreaOfStudies, 'is-valid':
!missingAreaOfStudies }"
            v-model="area_of_studies">
            {% for item in area_of_studies %}
            <option value="{{ item.id }}" {% if item.id == add_info.area_of_studies
%} selected
                {% endif %}>
                {{ item.area_of_studies }}
            </option>
            {% endfor %}
        </select>
        <div class="invalid-feedback">Please fill field</div>
        <div class="valid-feedback">Looks good!</div>
    </div>
    <div class="my-3"> <label>Degree</label>
    <div class="input-group">
        <div class="input-group-prepend"> <span class="input-group-text"><i
            class="fa fa-user-tie"></i></span> </div>
        <select required class="form-control" name="degree"
            v-bind:class="{ 'is-invalid': missingDegree, 'is-valid':
!missingDegree }"
            v-model="degree">
            <option value="{{ add_info.degree.key }}">Choose degree</option>
            {% for key, degree in degrees %}
            <option value="{{ key }}" {% if key == add_info.degree %} selected {%
endif %}>
                {{ degree }} </option>
            {% endfor %}
        </select>
        <div class="invalid-feedback">Please fill field</div>
        <div class="valid-feedback">Looks good!</div>
    </div>
</div>
<div class="col-md-6">
    <div class="my-3"> <label>Linked In profile</label>
    <div class="input-group">
        <div class="input-group-prepend"> <span class="input-group-text"><i
            class="fab fa-linkedin"></i></span> </div>
        <input type="text" class="form-control" placeholder="" name="linkedin"
            value="{{ add_info.linkedin }}" v-model="linkedin"
            v-bind:class="{ 'is-invalid': missingLinkedin, 'is-valid':
!missingLinkedin }">
        <div class="invalid-feedback">Please fill up this field.</div>
        <div class="valid-feedback">Looks ok !</div>
    </div>
</div>
<div class="my-3"> Languages
    <span class="power-chip" v-for="lang in languages" :key="lang">[[ lang ]]
    <span class="power-chip-btn" v-on:click="remove(lang)">&times;</span></div>
    <input name="languages" type="hidden" v-bind:value="lang"></span>
</label>
    <div class="input-group">
        <div class="input-group-prepend"> <span class="input-group-text"><i
            class="fa fa-flag"></i></span></div>
        <div class="input-group-append">
            <a class="btn btn-outline-secondary" role="button" v-
on:click="add()">Add</a>
        </div>
    </div>

```



```

        {% get_available_languages as LANGUAGES %}
        <select v-model="selected_language" class="custom-select form-control"
!missingLanguages)">
            v-bind:class="{ 'is-invalid': missingLanguages, 'is-valid':
                <option selected="selected">Choose language</option>
                {% get_language_info_list for LANGUAGES as languages %}
                {% for language in languages %}
                <option> {{ language.name }} </option>
                {% endfor %}
            </select>
            <div class="invalid-feedback">This field is required, please fill field
            </div>
            <div class="valid-feedback">Looks good!</div>
        </div>
    </div>
    <div class="my-3"> <label>Country</label>
        <div class="input-group">
            <div class="input-group-prepend">
                <span class="input-group-text">
                    <i v-if="missingCountry" class="fa fa-flag"></i>
                    
                </span> </div>
                {% load countries %}
                {% get_countries as countries %}
                <select required class="form-control"
!missingCountry)" id="country"
                    v-bind:class="{ 'is-invalid': missingCountry, 'is-valid':
                        name="country" v-model="country" @change="selectCountry()">
                        <option value="{{ country.name }}">Select country</option>
                        {% for country in countries %}
                        <option value="{{ country.code }}"
                            {% if country.name == add_info.country %}selected{% endif %}>
                            {{ country.name }}</option>
                        {% endfor %}
                    </select>
                    <div class="invalid-feedback">This field is required, please fill
field</div>
                    <div class="valid-feedback">Looks good!</div>
                </div>
            </div>
        </div>
    </div>
    <div class="row">
        <div class="col-12">
            <button id="singlebutton_add_info" class="btn primary-button btn-lg btn-
block">Update
                info
            </button>
        </div>
    </div>
</form>
</div>
{% endif %}

{% if edit_status == "edit_skills" %}
<div class="power-header-card">
    <div class="card-body">
        <i class="fa d-block fa-user-tag fa-5x mb-4 textprimary"></i>
        <h2><b>Fill Your skills</b></h2>
    </div>
</div>

<div class="power-content-card">
    <div class="card-body">
        <div class="card-body">
            <h4 class="mb-3 card-title"><b>Add some skills</b></h4>
            <div id="emsi">
                <form method="post">
                    {% csrf_token %}
                    <input name="edit_type" type="hidden" value="student_skill">
                    <input name="edit_status" type="hidden" value="{{ edit_status }}">
                </div class="row">
                    <div class="col-md-6 mb-3"> <label>Search</label>

```



```

        <div class="input-group">
          <div class="input-group-prepend">
            <span class="input-group-text"> <i class="fas fa-search-
plus"></i></span>
          </div>
          <input type="text" v-on:keyup.enter="get_skills" v-model="txtInput"
class="form-control"
          id="firstName" placeholder="Search" formnovalidate>
        </div><br>
        <div class="power-chip-group">
          <div class="power-chip" v-for="item in items_returned_by_ip" v-
bind:key="item.id"
          v-on:click="add_to_skill_list(item)">
            [[ item ]]
          </div>
        </div>
        <div class="col-md-6 mb-3">
          <h4 class="mb-3 card-title"><b>Added</b></h4>
          <div class="progress">
            <div class="progress-bar" role="progressbar"
aria-valuemin="0"
            v-bind:style="{width: [[ progress ]] + '%'}" aria-valuenow="25"
            aria-valuemax="100">[[progress]]%</div>
          </div>
          <hr class="mb-4">
          <div class="power-chip-group">
            <div class="power-chip" v-for="item in added_skills" v-
bind:key="item.id">[[
            item ]]
            <span class="power-chip-btn" v-
on:click="remove(item)">&times;</span>
            <input name="skill" type="hidden" v-bind:value="item">
          </div>
          </div>
          <hr class="mb-4">
          <button id="singlebutton_skills" name="singlebutton"
class="btn primary-button btn-lg btn-block">Update info
          </button>
        </form>
      </div>
    </div>
  </div>
{% endif %}

{% if not edit_status or edit_status == "edit_close" %}
<div class="power-content-card">
  <div class="card-body">
    <div class="card-body">
      <h4><b>List of offers</b></h4></b></h4>
      <p class="font-weight-bold">List of offers you are applying for</p>
      <div class="row my-1 d-none d-sm-flex">
        <div class="col-sm-1 my-1 d-flex align-items-center justify-content-center">
          <b>#</b>
        </div>
        <div class="col-sm-3 my-1 d-flex align-items-center">
          <b>Ofert name</b>
        </div>
        <div class="col-sm-2 my-2 d-flex align-items-center justify-content-center">
          <b>Startup</b>
        </div>
        <div class="col-sm-2 my-2 d-flex align-items-center justify-content-center">
          <b>Preview</b>
        </div>
      </div>
      {% for item in student_offers %}
      <div class="row my-1" style="border-top: solid 1px lightgrey;">
        <div class="col-1 col-sm-1 my-1 d-flex align-items-center justify-content-center">
          {{ forloop.counter }}
        </div>
    </div>

```




```

        {%endif%}
    </h3>
</div>
<div class="col-md-6">
    <p><b>Contact:</b> <a href="mailto:{{ vue_user_obj.add_info.user.email }}">
        {{ vue_user_obj.add_info.user.email }}</a></p>
</div>
</div>
<hr>
<div class="row">
    <div class="col-md-6 custom-border-right">
        <p><b>Home institution:</b>
            {% if vue_user_obj.add_info.home_institution %}
            {{ vue_user_obj.add_info.home_institution }}
            {% else %}
            <span class="text-danger">
                We cannot detect your university
            </span>
            {% endif %}
        </p>
        <p><b>Area of Studies:</b>
            {% if vue_user_obj.area_of_studies %}
            {{ vue_user_obj.area_of_studies }}
            {% else %}
            <span class="text-danger">
                {{ warning_info }}
            </span>
            {% endif %}
        </p>
        <p><b>Degree:</b>
            {% if vue_user_obj.add_info.get_degree_display %}
            {{ vue_user_obj.add_info.get_degree_display }}
            {% else %}
            <span class="text-danger">
                {{ warning_info }}
            </span>
            {% endif %}
        </p>
    </div>
    <div class="col-md-6">
        <p><b>Linked In profile:</b>
            {% if vue_user_obj.add_info.linkedin %}
            {{ vue_user_obj.add_info.linkedin }}
            {% else %}
            <span class="text-danger">
                {{ warning_info }}
            </span>
            {%endif%}
        </p>
        <p><b>Languages:</b>
            <span class="power-list-group">
                {% for key in vue_user_obj.languages %}
                <span class="power-chip">{{ key }}</span>
                {% empty %}
                <span class="text-danger">
                    {{ warning_info }}
                </span>
                {% endfor %}
            </span></p>
        <p><b>Country:</b>
            {% if vue_user_obj.add_info.country %}
            <span class="power-chip-country">
                
                {% load countries %}
                {% get_country vue_user_obj.add_info.country as country %}
                {{ country.name }}
            </span>
            {% else %}
            <span class="text-danger">
                {{ warning_info }}
            </span>
            {% endif %}
        </p>
    </div>
</div>

```



```

    </p>
  </div>
</div>
<div class="row">
  <div class="col-12">
    <hr>
    <p><b>Skills:</b>
      <span class="power-list-group">
        {% for itemskill in vue_user_obj.skills %}
        <span class="power-chip">{{ itemskill }}</span>
        {% empty %}
        <span class="text-danger">
          {{ warning_info }}
        </span>
        {% endfor %}
      </span></p>
  </div>
</div>

```

20. university_account.html

```

{% extends 'base.html' %}
{% load static %}
{% block content %}

<div class="power-header-card">
  <div class="card-body">
    <i class="fa d-block fa-graduation-cap fa-5x mb-4 textprimary"></i>
    <h2 class="font-weight-bold">University account</h2>
  </div>
</div>

<div class="power-error-card">
  <div class="row">
    {% if form.errors %}
    <div class="col-md-4 order-md-2">
      <h4 class="d-flex justify-content-between mb-3">
        <span class="text-muted"></span><b>Messages</b></span>
        <span class="badge badge-secondary badge-pill">
          <i class="fas fa-address-card"> </i>
          {{ form.errors|length }} </span> </h4>
      <ul class="list-group">
        {% for field in form %}
        {% for error in field.errors %}
        <li class="list-group-item d-flex justify-content-between bg-light">
          <div class="text-danger">
            <div class="row">
              <div class="col-md-2 col-sm-2">
                <i class="fa fa-exclamation-triangle warning-color d-block" aria-
hidden="true"></i>
              </div>
              <div class="col-md-10 col-sm-10">
                <h6 class="my-0 warning-color d-block"><b>{{ error|escape }}</b></h6>
              </div>
            </div>
          </div>
        </li>
        {% endfor %}
        {% endfor %}
      </ul>
    </div>
    {% endif %}
  </div>
  <hr class="mb-4">
</div>

<div class="power-content-card">
  <div class="card-body">
    <div class="row">
      <div class="d-none d-md-block col-md-6 custom-border-right">
        <div class="d-flex justify-content-center align-items-center mx-auto power-thumb">
          

```



```

        </div>
    </div>

    <div class="col-md-6 custom-border-right">
        <div class="row row-flex d-flex d-md-none">
            <div class="col-3 my-2">
                <div class="d-flex justify-content-center align-items-center mx-auto power-
thumb">
                    
                </div>
            </div>
            <div class="col-9">
                <div class="d-flex justify-content-center align-items-center mx-auto h-100">
                    <div>
                        <h5 class="text-center font-weight-bold">
                            {% if add_info.university_name_full != '' %}
                            {{ add_info.university_name_full }}
                            {% else %}
                            <span class="text-danger">
                                < Please set up name university>
                            </span>
                            {%endif%}
                        </h5>
                    </div>
                </div>
            </div>
            <div>
                <h3 class="d-none d-md-flex font-weight-bold">
                    {% if add_info.university_name_full != '' %}
                    {{ add_info.university_name_full }}
                    {% else %}
                    <span class="text-danger">
                        < Please set up name university>
                    </span>
                    {%endif%}
                </h3>
                <hr>
                <p><b>Short Univerity Name:</b>
                    {% if add_info.university_name_short != '' %}
                    {{ add_info.university_name_short }}
                    {% else %}
                    <span class="text-danger">Please fill up this field</span>
                    {%endif%}</p>
                <p><b>Country:</b>
                    {% if add_info.country != '' %}
                    {% load countries %}
                    {% get_country add_info.country as countcode %}
                    <span class="power-chip-country">
                        
                    {% else %}
                    <span class="text-danger"><i class="far fa-flag mr-2"></i>No Country</span>
                    {%endif%}
                </p>
                <p><b>Linked In profile:</b>
                    {% if add_info.linkedin != '' %}
                    {{ add_info.linkedin }}
                    {% else %}
                    <span class="text-danger">Please fill up this field</span>
                    {%endif%}</p>
            </div>
        </div>
    </div>
</div>

<div class="power-content-card">
    <div class="card-body">
        <div class="row">
            <div class="col-6 d-flex align-items-end">
                <form method="post" class="card-text w-100">
                    {% csrf_token %}
                    {% if edit_status == "edit_info" %}

```



```

                <input name="edit_status" type="hidden" value="edit_close">
                <button id=" singlebutton_info" name="singlebutton" class="btn btn-secondary btn-
lg btn-block">Hide
                Edit</button>
                {% else %}
                <input name="edit_status" type="hidden" value="edit_info">
                <button id=" singlebutton_info" name="singlebutton" class="btn primary-button btn-
lg btn-block">Edit
                Info</button>
                {% endif %}
            </form>
        </div>
        <div class="col-6 d-flex align-items-end">
            <form method="post" class="card-text w-100">
                {% csrf_token %}
                {% if edit_status == "edit_manager" %}
                <input name="edit_status" type="hidden" value="edit_close">
                <button id=" singlebutton_manager" name="singlebutton"
                    class="btn btn-secondary btn-lg btn-block">Hide Edit</button>
                {% else %}
                <input name="edit_status" type="hidden" value="edit_manager">
                <button id=" singlebutton_manager" name="singlebutton"
                    class="btn primary-button btn-lg btn-block">Edit Manager</button>
                {% endif %}
            </form>
        </div>
    </div>
</div>
</div>
{% if edit_status == "edit_info" %}
<div class="power-content-card" id="validate_form_university">
    <div class="card-body">
        <div class="row">
            <div class="col-md-6 d-flex align-items-end custom-border-right">
                <form action="{% url 'power:university_account' %}" method="post"
enctype="multipart/form-data"
                class="card-text mr-0 pr-0 w-100">
                    {% csrf_token %}
                    <input name="edit_type" type="hidden" value="university_emblem">
                    <input name="edit_status" type="hidden" value="{{ edit_status }}">
                    <div class="my-3"> <label>Univeristy Emblem</label>
                    <div class="input-group">
                        <div class="input-group-prepend">
                            <span class="input-group-text" id="inputGroupFileAddon01"><i
                                class="fa fa-university"></i></span>
                        </div>
                        <div class="custom-file">
                            <input type="file" class="custom-file-input" name="image"
                                aria-describedby="inputGroupFileAddon01" @change="filesSelected">
                            <label class="custom-file-label" for="inputGroupFile01"
                                v-if="!files || !files.length">Choose
                                file</label>
                            <label class="custom-file-label" for="inputGroupFile01" v-for="file in
files"
                                :key="file.name"> [[ file.name ]]</label>
                        </div>
                    </div>
                </div>
                <button type="submit" value="Submit" class="btn primary-button btn-lg btn-
block">Update
                emblem
                </button>
            </form>
        </div>
    </div>
</div>
<form method="post" class="card-text w-100">
    {% csrf_token %}
    <input name="edit_type" type="hidden" value="university_info">
    <input name="edit_status" type="hidden" value="{{ edit_status }}">
    <div class="row">
        <div class="col-md-6">

```



```

                <div class="my-3"> <label>Full Univerity Name</label>
                <div class="input-group">
                    <div class="input-group-prepend"> <span class="input-group-text"><i
                        class="fa fa-user-tie"></i></span>
                    </div>
                    <input
                        required
                        type="text"
                        class="form-control"
name="university_name_full"
                        value="{{
                            add_info.university_name_full
                        }}"
                        v-
model="university_name_full"
                        v-bind:class="{ 'is-invalid': missingUniversityNameFull, 'is-valid':
!missingUniversityNameFull }">
                    <div class="invalid-feedback">Please fill up this field.</div>
                    <div class="valid-feedback">Looks ok !</div>
                </div>
            </div>
            <div class="my-3"> <label>Short Univerity Name</label>
            <div class="input-group">
                <div class="input-group-prepend"> <span class="input-group-text"><i
                    class="fa fa-university"></i></span>
                </div>
                <input
                    required
                    type="text"
                    class="form-control"
name="university_name_short"
                    value="{{
                        add_info.university_name_short
                    }}"
                    v-
model="university_name_short"
                    v-bind:class="{ 'is-invalid': missingUniversityNameShort, 'is-valid':
!missingUniversityNameShort }">
                <div class="invalid-feedback">Please fill up this field.</div>
                <div class="valid-feedback">Looks ok !</div>
            </div>
        </div>
        <div class="col-md-6">
            <div class="my-3"> <label>Country</label>
            <div class="input-group">
                <div class="input-group-prepend"><span class="input-group-text">
                    <i v-if="missingCountry" class="fa fa-flag"></i>
                    
                </span> </div>
                {% load countries %}
                {% get_countries as countries %}
                <select required class="form-control"
                    v-bind:class="{ 'is-invalid':
!missingCountry}" id="country"
                    name="country" v-model="country" @change="selectCountry()">
                    <option value="{{
                        country.name
                    }}">Select country</option>
                    {% for country in countries %}
                    <option value="{{
                        country.code
                    }}"
                        {% if country.name == add_info.country %}selected{% endif %}>
                        {{
                            country.name
                        }}</option>
                    {% endfor %}
                </select>
                <div class="invalid-feedback">This field is required, please fill field
                </div>
                <div class="valid-feedback">Looks good!</div>
            </div>
        </div>
        <div class="my-3"> <label>Linked In profile</label>
        <div class="input-group">
            <div class="input-group-prepend"> <span class="input-group-text"><i
                class="fab fa-linkedin"></i></span>
            </div>
            <input
                type="text"
                class="form-control"
                name="linkedin"
                value="{{
add_info.linkedin }}"
                v-model="linkedin"
                v-bind:class="{
!missingLinkedin }">
                <div class="invalid-feedback">Please fill up this field.</div>
                <div class="valid-feedback">Looks ok !</div>
        </div>
    </div>
</div>
<div class="row">

```



```

        <div class="col-md-12">
          <button id="singlebutton_add_info" class="btn primary-button btn-lg btn-
block">Update
            info
          </button>
        </div>
      </div>
    </form>
  </div>
</div>
</div>
<div class="power-content-card">
  <div class="card-body">
    <div class="row">
      <div class="col-12">
        <h4 class="card-title"><b>University Email Domains</b></h4>
      </div>
    </div>
    <div class="row">
      <div class="col-md-6 custom-border-right">
        <form method="post" class="card-text w-100">
          {% csrf_token %}
          <input name="edit_type" type="hidden" value="university_email_domains">
          <input name="edit_status" type="hidden" value="{{ edit_status }}">
          <input name="user_pk" type="hidden" value="{{ add_info.pk }}">
          <div class="my-3"> <label>Add</label>
            <div class="input-group mb-3">
              <div class="input-group-prepend"> <span class="input-group-text"><i
Domains"
              class="fa fa-at"></i></span>
            </div>
            <input type="text" class="form-control" placeholder="University Email
name="domain">
              aria-label="University Email Domains" aria-describedby="button-addon"
            </div>
            <div class="input-group-append">
              <button class="btn primary-button button-action-width">Add</button>
            </div>
          </div>
        </form>
      </div>
      <div class="col-md-6 custom-border-right">
        <div class="my-3"> <label>Accepted domains</label>
        {% if domains %}
        <form method="post">
          <input name="edit_status" type="hidden" value="{{ edit_status }}">
          {% csrf_token %}
          <ul id="list" class="list-group list-group-horizontal-lg">
            {% for domain in domains %}
              <li class="list-group-item d-flex justify-content-between align-items-
center py-0 pr-0">
                {{ domain }}
                <button type="submit" name="remove_domain" value="{{ domain }}"
                class="btn btn-danger">Remove</button>
              </li>
            {% endfor %}
          </ul>
        </form>
        {% endif %}
      </div>
    </div>
  </div>
</div>
</div>
{% endif %}

{% if edit_status == "edit_manager" %}
<div class="power-content-card">
  <div class="card-body">
    <div class="row">
      <div class="col-md-6 custom-border-right">
        <h4 class=" my-3 card-title"><b>Manager info</b></h4>
        <form method="post" class="card-text">

```



```

    {% csrf_token %}
    <input name="edit_type" type="hidden" value="university_manager">
    <input name="edit_status" type="hidden" value="{{ edit_status }}">
    <div class="my-3"> <label>First name</label>
      <div class="input-group">
        <div class="input-group-prepend"> <span class="input-group-text"><i
          class="fa fa-user"></i></span>
        </div>
        <input      required      type="text"      class="form-control"      value="{{
user.first_name}}"
          name="first_name">
        </div>
      </div>
    <div class="my-3"> <label>Last name</label>
      <div class="input-group">
        <div class="input-group-prepend"> <span class="input-group-text"><i
          class="fa fa-user"></i></span>
        </div>
        <input      required      type="text"      class="form-control"      value="{{
user.last_name}}"
          name="last_name">
        </div>
      </div>
    <div class="my-3"> <label>Username</label>
      <div class="input-group">
        <div class="input-group-prepend"> <span class="input-group-text"><i
          class="fas fa-at"></i></span>
        </div>
        <input      required      type="text"      class="form-control"      value="{{ user.email }}"
name="email">
      </div>
    </div>
    <button id="singlebutton" name="singlebutton" class="btn primary-button btn-lg btn-
block">Update
      info</button>
    </form>
  </div>
  <div class="col-md-6">
    <h4 class="my-3 card-title"><b>Change Password</b></h4>
    <form method="post" class="card-text">
      {% csrf_token %}
      <input name="edit_type" type="hidden" value="university_password">
      <input name="edit_status" type="hidden" value="{{ edit_status }}">
      <div class="my-3"> <label>Current password</label>
        <div class="input-group">
          <div class="input-group-prepend"> <span class="input-group-text"><i
            class="fa fa-lock"></i></span>
          </div>
          <input      required      type="password"      class="form-control"
placeholder="Password"
            name="old_password">
          </div>
        </div>
      <div class="my-3"> <label>New password</label>
        <div class="input-group">
          <div class="input-group-prepend"> <span class="input-group-text"><i
            class="fa fa-lock"></i></span>
          </div>
          <input      required      type="password"      class="form-control"
placeholder="Password"
            name="new_password1">
          </div>
        </div>
      <div class="my-3"> <label>Confirm new password</label>
        <div class="input-group">
          <div class="input-group-prepend"> <span class="input-group-text"><i
            class="fa fa-lock"></i></span>
          </div>
          <input      required      type="password"      class="form-control"      placeholder="Confirm
password"
            name="new_password2">
          </div>
        </div>
      </div>
    </form>
  </div>
  
```




```

    {% endif %}
  </div>
  <hr class="mb-4">
</div>
<div class="container mb-3" id="validate_form_edit_offer">
  <div class="col-md-12 p-0">
    <div class="card shadow p-3 bg-white rounded">
      <div class="card-body align-bottom">
        <div class="row">
          <div class="col-md-6 custom-border-right" id="validate_form">
            <form method="post">
              {% csrf_token %}
              <input name="edit_type" type="hidden" value="offer_description">
              <div
                class="d-flex justify-content-center align-items-center mx-
auto power-img-thumbnail">
                
              </div>
              <div class="my-3"> <label>Offer name</label>
              <div class="input-group">
                <div class="input-group-prepend"> <span class="input-
group-text"><i
                  class="fa fa-user-tie"></i></span>
                </div>
                <input
                  required
                  type="text"
                  class="form-control"
                  name="offer_name"
                  value="{{ offer.offer_name }}">
              </div>
            </div>
            <div class="my-3">
              <label>Short Description (max 500 chars)</label>
              <div id="offer_job_description"></div>
              <div class="form-group">
                <textarea
                  class="form-control invisible"
                  value="{{
job_info.description }}"
                  v-model="description" name="description"
                  v-bind:class="{ 'is-invalid': missingDescription, 'is-
valid': !missingDescription }"
                  style="height:
id="textarea_description"></textarea>
                  remaining==0]">[[instruction]]</small>
                <div
                  class="invalid-feedback">Please
description.</div>
                <div class="valid-feedback">Looks ok !</div>
              </div>
            </div>
            <div class="my-3"> <label>Country</label>
            <div class="input-group">
              <div class="input-group-prepend">
                <span class="input-group-text">
                  <i v-if="missingCountry" class="fa fa-flag"></i>
                  
                </span>
              </div>
              <div class="input-group">
                <select required class="form-control"
                  v-bind:class="{ 'is-invalid': missingCountry, 'is-
valid': !missingCountry}"
                  id="country" name="country" @change="selectCountry()"
                  v-model="country">
                <option value="">Select country</option>
                {% for country in countries %}
                <option value="{{ country.code }}">
                  {% if country.name == job_info.country
%}>selected{% endif %}>
                  {{ country.name }}</option>
                {% endfor %}
              </select>
              <div class="invalid-feedback">This field is required,
please fill field

```



```

    </div>
    <div class="valid-feedback">Looks good!</div>

  </div>
</div>
<div class="my-3"> <label>City</label>
  <div class="input-group">
    <div class="input-group-prepend"> <span class="input-
group-text"><i
      class="fa fa-user-tie"></i></span>
    </div>
    <input required type="text" class="form-control"
      value="{{ job_info.city }}" v-model="city"
      v-bind:class="{ 'is-invalid': missingCity, 'is-valid':
!missingCity}">
    <div class="invalid-feedback">This field is required,
please fill field
    </div>
    <div class="valid-feedback">Looks good!</div>
  </div>
</div>
<button id="singlebutton_add_info"
  class="btn primary-button btn-lg btn-block">Update info
</button>
</form>
</div>

<div class="col-md-6">
  <form method="post">
    {% csrf_token %}
    <input name="edit type" type="hidden" value="offer_details">
    <div class="my-3"> <label>Availability of offering</label>
    <div class="input-group">
      <div class="form-row w-100 mx-0 px-0">
        <div class="col-4 col-lg-2 text-center mx-0">
          <span class="power-label">from:</span>
        </div>
        <div class="col-8 col-lg-4 mx-0 px-0">
          <div class="input-group">
            <div class="input-group-prepend"> <span
alt"></i></span>
              class="input-group-text"><i
                class="far fa-calendar-
control px-1 power-date"
                alt"></i></span>
            </div>
            <input required type="date" class="form-
              name="availability_offering_from"
              v-model="availability_offering_from"
              v-bind:class="{ 'is-invalid':
missingDatesAvaFr, 'is-valid': !missingDatesAvaFr}"
              value="{{
job_info.availability_offering_from|date:'Y-m-d'}}"
              @change="selectDateAvaFrom">
            </div>
          </div>
          <div class="col-4 col-lg-2 text-center mx-0">
            <span class="power-label">to:</span>
          </div>
          <div class="col-8 col-lg-4 mx-0 px-0">
            <div class="input-group">
              <div class="input-group-prepend"> <span
alt"></i></span>
                class="input-group-text"><i
                  class="far fa-calendar-
control px-1 power-date"
                  alt"></i></span>
              </div>
              <input required type="date" class="form-
                name="availability_offering_to"
                v-model="availability_offering_to"
                v-bind:class="{ 'is-invalid':
missingDatesAvaTo, 'is-valid': !missingDatesAvaTo}"
              >
            </div>
          </div>
        </div>
      </div>
    </div>
  </form>

```



```

job_info.availability_offering_to|date:'Y-m-d'}}"
value="{{
@change="selectDateAvaTo">
</div>
</div>
</div>
</div>
<div class="my-3"> <label>Duration (month)</label>
<div class="input-group">
<div class="form-row w-100 mx-0 px-0">
<div class="col-4 col-lg-2 text-center mx-0">
<span class="power-label">min:</span>
</div>
<div class="col-8 col-lg-4 mx-0 px-0">
<div class="input-group">
<div class="input-group-prepend"> <span
class="input-group-text"><i
class="fas fa-greater-
than"></i></span>
</div>
<input required type="number" min="0"
list="job_period_from_list" class="form-
control px-1"
name="job_period_from" value="{{
offer.job_period_from }}" v-
model="job_period_from"
:class="{ 'is-invalid': missingPeriodFrom,
'is-valid': !missingPeriodFrom }"
@mouseover="clearPeriodFrom">
<datalist id="job_period_from_list">
<option v-for="i in l2">[[ i ]]</option>
</datalist>
</div>
</div>
<div class="col-4 col-lg-2 text-center mx-0">
<span class="power-label">max:</span>
</div>
<div class="col-8 col-lg-4 mx-0 px-0">
<div class="input-group">
<div class="input-group-prepend"> <span
class="input-group-text"><i
class="fas fa-less-
than"></i></span>
</div>
<input required type="number" min="0"
class="form-control px-1"
value="{{ offer.job_period_to }}" v-
model="job_period_to"
:class="{ 'is-invalid': missingPeriodTo,
'is-valid': !missingPeriodTo }"
@mouseover="clearPeriodTo">
<datalist id="job_period_to_list">
<option v-for="i in l2">[[ i ]]</option>
</datalist>
</div>
</div>
</div>
</div>
<div class="my-3"> <label>Placement Type</label>
<div class="input-group">
<div class="input-group-prepend"> <span class="input-
group-text"><i
class="fa fa-user-tie"></i></span>
</div>

```



```

    <select required class="form-control" name="job_type">
      {% for key, job_type in job_types %}
      <option value="{{ key }}"
        {% if key == offer.job_type %}selected{% endif
%}>
        {{ job_type }}</option>
      {% endfor %}
    </select>
  </div>
</div>
<div class="my-3">
  <label>Language
    <div class="power-list-group">
      <div class="power-chip" v-for="lang in languages"
: key="lang">[[ lang ]]
        <span class="power-chip-btn"
          v-on:click="remove(lang)">&times;</span>
        <input name="languages" type="hidden" v-
bind: value="lang">
      </div>
    </div>
  </label>
  <div class="input-group">
    <div class="input-group-prepend"> <span class="input-
group-text"><i
      class="fa fa-user-tie"></i></span>
    </div>
    <select required v-model="selected_language"
      v-bind: class="{ 'is-invalid': missingLanguages, 'is-
valid': !missingLanguages}"
      class="custom-select form-control">
      <option selected="selected">Choose language</option>
      {% get_available_languages as LANGUAGES %}
      {% get_language_info_list for LANGUAGES as languages
%}
      {% for language in languages %}
      <option> {{ language.name }} </option>
      {% endfor %}
    </select>
    <div class="input-group-append">
      <a class="btn btn-outline-secondary" role="button"
        v-on:click="add()">Add</a>
    </div>
    <div class="invalid-feedback">This field is required,
please fill field
    </div>
    <div class="valid-feedback">Looks good!</div>
  </div>
</div>
<div class="my-3"> <label>Salary</label>
  <div class="input-group">
    <div class="input-group-prepend"> <span class="input-
group-text"><i
      class="fa fa-user-tie"></i></span>
    </div>
    <select required class="form-control" name="paid">
      {% for key, salary_type in salary %}
      <option value="{{ key }}"
        {% if key == offer.paid %}selected{% endif %}>
        {{ salary_type }} </option>
      {% endfor %}
    </select>
  </div>
</div>
<button id="singlebutton_add_info"
  class="btn primary-button btn-lg btn-block">Update info
</button>

```



```

        </form>
    </div>
</div>
</div>
</div>
</div>
</div>
<div class="container mb-3">
    <div class="col-md-12 p-0">
        <div class="card shadow p-3 bg-white rounded">
            <div class="card-body">
                <h4 class="mb-3 card-title"><b>Preferred skills on offer</b></h4>
                <div id="emsi">
                    <form method="post">
                        {% csrf_token %}

                        <input name="edit_type" type="hidden" value="offer_skill">
                        <div class="row">
                            <div class="col-md-6 mb-3"> <label>Search</label>
                            <div class="input-group">
                                <div class="input-group-prepend">
                                    <span class="input-group-text"> <i
                                        class="fas fa-search-plus"></i></span>
                                </div>
                                <input type="text" v-on:keyup.enter="get_skills" v-
model="txtInput"
placeholder="Search" formnovalidate>
                                    class="form-control" id="firstName"
                                </div><br>
                                <div class="power-chip-group">
                                    <div class="power-chip" v-for="item in
items_returned_by_ip"
                                        v-bind:key="item.id" v-
on:click="add_to_skill_list(item)">
                                        [[ item ]]
                                    </div>
                                </div>
                                <div class="col-md-6 mb-3">
                                    <h4 class="mb-3 card-title"><b>Added</b></h4>
                                    <div class="progress">
                                        <div class="progress-bar" role="progressbar"
                                            v-bind:style="{width: [[ progress ]] + '%'}" aria-
valuenow="25"
                                            aria-valuemin="0"
                                            aria-
valuemax="100">[[progress]]%</div>
                                        </div>
                                    <hr class="mb-4">
                                    <div class="power-chip-group">
                                        <div class="power-chip" v-for="item in added_skills" v-
bind:key="item.id">[[
                                            item ]]
                                        <span class="power-chip-btn" v-
on:click="remove(item)">&times;</span>
                                        <input name="skill" type="hidden" v-bind:value="item">
                                        </div>
                                    </div>
                                </div>
                                <hr class="mb-4">
                                <button id="singlebutton_skills" name="singlebutton"
                                    class="btn primary-button btn-lg btn-block">Update info
                                </button>
                            </form>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>
</div>
</div>
<div class="container mb-3" id="validate_offer_specification">
    <div class="col-md-12 p-0">
        <div class="card shadow p-3 bg-white rounded">
            <div class="card-body">
                <div class="row">

```



```

<div class="col-lg-4 col-md-12 custom-border-right">
  <h4 class=" my-3 card-title"><b>Required documents</b></h4>
  <form method="post" class="card-text w-100">
    {% csrf_token %}
    <input name="edit_type" type="hidden" value="offer_document">
    <div class="my-3"> <label>Add</label>
    <div class="input-group mb-3">
      <div class="input-group-prepend"> <span class="input-
group-text"><i
class="fas fa-file"></i></span>
      </div>
      <input type="text" class="form-control" placeholder="Type
of document"
      aria-label="Type of document" aria-
describedby="button-addon"
      name="document">
      <div class="input-group-append">
        <button class="btn primary-button button-action-
width">Add</button>
      </div>
    </div>
  </div>
</form>
<div class="my-3"> <label>Required documents</label>
  {% if documents %}
  <form method="post">
    {% csrf_token %}
    <ul id="list" class="list-group list-group-horizontal-lg">
      {% for document in documents %}
      <li
align-items-center py-0 pr-0">
        class="list-group-item d-flex justify-content-between
document }}"
        <button type="submit" name="remove_document" value="{{
class="btn btn-danger">Remove</button>
      </li>
      {% endfor %}
    </ul>
  </form>
  {% endif %}
</div>
</div>
<div class="col-lg-4 col-md-6 custom-border-right">
  <h4 class=" my-3 card-title"><b>Responsibilities</b></h4>
  <form method="post" class="card-text">
    {% csrf_token %}
    <div class="form-group">
      <input
value="offer_responsibilities">
      name="edit_type" type="hidden"
      <label
responsibilities</label>
      for="startupbriefdescr">List of
      <div id="offer_job_responsibilities"></div>
      <textarea
job_info.responsibilities }}"
      class="form-control invisible" value="{{
      v-model="responsibilities" name="responsibilities"
      'is-valid': !missingResponsibilities }}"
      v-bind:class="{ 'is-invalid': missingResponsibilities,
      style="height: 0px;"></textarea>
      <small
remaining_responsibilities==0">[[instruction_responsibilities]]</small>
      :class="{ 'text-danger':
      <div class="invalid-feedback">Please fill description.</div>
      <div class="valid-feedback">Looks ok !</div>
      </div>
      <button id="singlebutton_password" name="singlebutton"
      class="btn primary-button btn-lg btn-block">Update</button>
    </form>
  </div>
</div>
<div class="col-lg-4 col-md-6 custom-border-right">

```




```

<script type='text/javascript'>
  var job_obj = {{ vue_job_obj | safe }}
</script>

{% if vue_languages %}
<script type='text/javascript'>
  var languages_obj = {{ vue_languages | safe }}
</script>
{% endif %}

{% if vue_skills %}
<script type='text/javascript'>
  var skills = {{ vue_skills | safe }}
</script>
{% endif %}

{% endif %}
<script src="https://cdn.jsdelivr.net/npm/lodash@4.13.1/lodash.min.js"></script>
<script src="{% static 'js/components/create_toastui_editor.js' %}"></script>
<script src="{% static 'js/components/ems_skills.js' %}"></script>
<link
href="https://cdnjs.cloudflare.com/ajax/libs/codemirror/5.48.4/codemirror.min.css"
rel="stylesheet"
type="text/css" />
<link
rel="stylesheet"
href="https://uicdn.toast.com/editor/2.5.2/toastui-editor.min.css"
type="text/css" />
<script src="https://uicdn.toast.com/editor/2.5.2/toastui-editor-all.min.js"></script>
<script src="{% static 'js/components/offer_form_validator_startup.js' %}"></script>

{% endblock extra_js %}

```

22. offer_preview.html

```

{% extends 'base.html' %}
{% load static %}
{% load auth_extras %}

{% block content %}

<div class="power-header-card">
  <div class="card-body {% if not active %}power-deactivated{% endif %}">
    <i class="fa d-block fa-graduation-cap fa-5x mb-4 textprimary"></i>
    <h2 class="font-weight-bold">{{ offer.startup__startup_name }}</h2>
  </div>
</div>

<div class="power-content-card {% if not active %}power-deactivated{% endif %}">
  <div class="card-body align-bottom">
    <div class="row">
      <div class="d-none d-sm-block col-md-6 custom-border-right" id="validate_form">
        <div class="d-flex justify-content-center align-items-center mx-auto power-img-thumbnail">
          
        </div>
        <br>
        <h6><b>Offer Description:</b></h6>
        <hr>
        <div id="offer_description" class="card-text" date-desc="{{ offer.description }}">
        </div>
      </div>

      <div class="col-md-6 custom-border-right">
        <div class="row row-flex d-flex d-sm-none align-items-center">
          <div class="col-3 my-2">
            
          </div>
          <div class="col-9">
            <h5 class="text-center font-weight-bold">{{ offer.offer_name }}</h5>
          </div>
        </div>

        <h3 class="d-none d-sm-inline font-weight-bold">{{ offer.offer_name }} </h3>

```



```

<hr>
{% if active %}
<p><i class="fas fa-eye"></i> This offer is active</p>
{% else %}
<p><i class="fas fa-eye-slash"></i> This offer is deactivated</p>
{% endif %}

<p><b>Offer visibility:</b> <br class="d-inline d-md-none">from:
  <span class="badge badge-pill badge-success">
    <i class="fas fa-calendar mr-2"></i>
    {{ offer.availability_offering_from }}
  </span>
  to:
  <span class="badge badge-pill badge-success">
    <i class="fas fa-calendar mr-2"></i>
    {{ offer.availability_offering_to }}
  </span>
</p>
<p><b>Country:</b>
  {% if offer.country != '' %}
  {% load countries %}
  {% get_country offer.country as countcode %}
  <span class="power-chip-country">
    
      {{countcode.name}}</span>
    {% else %}
    <span class="text-danger"><i class="far fa-flag mr-2"></i>No Country</span>
    {%endif%}
</p>
<p><b>City:</b> {{ offer.city }}</p>
<p><b>Duration:</b> <br class="d-inline d-md-none">
  {% if offer.job_period_from == 0.0 %}
  <span class="badge badge-pill badge-success">
    <i class="fas fa-calendar mr-2"></i>
    {{ offer.job_period_to }}
  </span>
  {% else %}
  from: <span class="badge badge-pill badge-success">
    <i class="fas fa-calendar mr-2"></i>
    {{ offer.job_period_from }}
  </span>
  to: <span class="badge badge-pill badge-success">
    <i class="fas fa-calendar mr-2"></i>
    {{ offer.job_period_to }}
  </span>
  {% endif %}
  {% if offer.job_period_to == 1.0 %}
  month
  {% else %}
  months
  {% endif %}
</p>
<p><b>Placement type:</b>
  {% for key, value in job_types %}
  {% if key == offer.job_type %} {{ value }} {% endif %}
  {% endfor %}
</p>
<p><b>Languages:</b>
  <span class="power-list-group">
    {% for key in languages %}
    <span class="power-chip">{{ key }}</span>
    {% endfor %}
  </span>
</p>
<p><b>Salary:</b>
  {% for key, value in salary %}
  {% if key == offer.paid %} {{ value }} {% endif %}
  {% endfor %}</p>
<hr>

```



```

    <p><b>Contact person:</b>< a href="mailto: {{ offer.startup_user_email }}">Send
Email</a>
    <br>{{ offer.startup_user_first_name }} {{ offer.startup_user_last_name }} </p>
    <hr>
    <p><b>Preferred skills on offer</b></p>
    <div class="power-chip-group">
        {% for item in skills %}
        <div class="power-chip">{{ item }} </div>
        {% endfor %}
    </div>
    <div class="d-sm-none d-block">
        <hr>
        <h6><b>Offer Description:</b></h6>
        <hr>
        <div id="offer_description_sm" class="card-text" data-desc="{{ offer.description
}}">
            </div>
        </div>
    </div>
</div>
</div>
</div>
<div class="power-content-card {% if not active %}power-deactivated{% endif %}">
    <div class="card-body">
        <div class="row">
            <div class="col-lg-4 col-md-12 custom-border-right" id="validate_form_offer">
                <h4 class="my-3 card-title">
                    {% if user|has_group:"student" and not applied %} <b>Required documents</b> {%
endif %}
                    <b>Required
documents</b>
                    {% if user|has_group:"startup" or user|has_group:"incubator" %} <b>Required
documents</b>
                    {% endif %}
                    {% if user|has_group:"student" and applied %} <b>Sended documents </b>{% endif %}
                </h4>
                <div class="my-3">
                    {% if vue_documents %}
                    {% if user|has_group:"startup" or user|has_group:"incubator" %}
                    <ul id="list" class="list-group list-group-horizontal-lg">
                        <div v-for="(value, index) in documents" :key="index">
                            <li class="list-group-item d-flex">[[ value ]]</li>
                        </div>
                    </ul>
                    {% endif %}
                    <form method="post" enctype="multipart/form-data" id="docs" class="card-text mr-0
pr-0 w-100">
                        <input name="edit_type" type="hidden" value="docs">
                        {% csrf_token %}
                        <ul id="list" class="list-group list-group-horizontal-lg">
                            <div v-for="(value, index) in documents" :key="index">
                                <li class="list-group-item d-flex">[[ value ]]</li>
                                <div class="custom-file">
                                    <input required type="file" class="custom-file-input" name="file"
aria-describedby="inputGroupFileAddon01"
v-bind:class="[ isValid[value] ? 'is-valid' : 'is-invalid' ]"
@change="filesSelected($event, value)"
accept="application/pdf">
                                    <label class="custom-file-label" for="inputGroupFileAddon01">
                                        Choose file </label>
                                    <label class="custom-file-label" for="inputGroupFileAddon01" v-
for="file in files"
                                        :key="file.name">
                                        [[ get_name(value) ]] </label>
                                    </div>
                                <br>
                            </div>
                        </ul>
                    </form>
                    <div class="invalid-feedback" style="display: inline-block;">[[message]]
                    </div>
                    {% endif %}

```




```

    </td>
    <td class="text-center">
      {{ record.job_offer.get_status_display }}
    </td>
    <td>
      <!-- Modal -->
      <div class="modal fade" id="item{{ forloop.counter }}" data-
backdrop="static" tabindex="-1"
role="dialog" aria-labelledby="staticBackdropLabel" aria-
hidden="true">
        <div class="modal-dialog" role="document">
          <div class="modal-content">
            <div class="modal-body">
              {% include "student/student_profile_card.html" with
vue_user_obj=record.vue_user_obj %}
              <hr>
              <p><b>Overlapping:</b>
                {{ record.overlapping_skills }} %
              </b>
              <span class="power-list-group">
                {% for itemskill in record.common_skills %}
                <span class="power-chip">{{ itemskill }}</span>
                {% empty %}
                N/A
                {% endfor %}
              </span></p>
              <p><b>Sended documents:</b>
                {% for doc in record.documents %}
                <a href="/media/{{ doc.file }}"
target="_blank">{{ doc.name_of_file }}</a><br>
                {% endfor %}
              </p>
            </div>
            <form name="yourForm" method="post">
              {% csrf_token %}
              <input
value="rating_and_comment">
                name="edit_type" type="hidden"

              <input name="student_id" type="hidden"
                value="{{ record.vue_user_obj.add_info.pk }}">
              <div class="modal-body text-justify">
                <div class="form-group row">
                  <label for="inputRating" class="col-4 col-form-
label"><b>Rating</b>
                    (0-100):</label>
                  <div class="col-4">
                    <input name="rating" type="text" class="form-
control"
                      id="inputRating{{ forloop.counter }}"
                      value="{{ record.job_offer.rating }}">
                    </div>
                  </div>
                  <div class="form-group row">
                    <label for="inputComment"
label"><b>Comment:</b></label>
                      class="col-4" col-form-
                      col-form-
                    <div class="col-6">
                      <textarea name="comment" class="form-control"
record.job_offer.comment}}</textarea>
                      id="inputComment">{{
                      </div>
                    </div>
                  <div class="modal-footer">
                    <button
id="singlebutton_modal"
                      type="submit" value="submit"
                      name="singlebutton"
                      class="btn primary-button btn-
block">Update</button>
                    <a href="#" class="btn btn-secondary" data-
dismiss="modal">Close</a>
                  </div>
                </div>
              </form>
            </div>
          </div>
        </div>
      </td>
  
```



```

        </div>
        </td>
    </tr>
    {% endfor %}
    <!-- end first row -->
</tbody>
</table>
</div>
</div>
</div>
{% endif %}

<div class="power-content-card {% if not active %}power-deactivated{% endif %}">
    <div class="card-body">
        <div align="center">
            <div class="row">

                {% if user|has_group:"student" %}
                <div class="col-6 col-sm-6">
                    <a href="{% url 'power:offers_list' 1 %}" class="btn btn-secondary btn-lg btn-block
mb-3"
                    role="button">Back</a>
                </div>
                {% if applied %}
                <div class="col-6 col-sm-6">
                    <div class="alert alert-danger" role="alert"> You applied for this offer. </div>
                </div>
                {% else %}
                <div class="col-6 col-sm-6" id="appliedOffer">
                    <button class="btn primary-button btn-lg btn-block mb-3" type="submit" form="docs"
value="Submit"
                    id="submitOfferApply" v-on:click="submitClick">
                    <span style="width: 2rem; height: 2rem;" role="status" aria-hidden="true"
id="spinnerApply"
                    :class="{ 'spinner-border': !loader }"></span>Submit</button>
                </div>
                {% endif %}
                {% endif %}

                {% if user|has_group:"startup" %}
                <div class="col-6 col-md-3 order-2 order-md-1">
                    <a href="{% url 'power:offers_list' 1 %}" class="btn btn-secondary btn-lg btn-block
mb-3"
                    role="button">List</a>
                </div>
                <div class="col-12 col-md-6 order-1 order-md-2">
                    <a href="{% url 'power:offer_edit' offer.pk %}" class="btn primary-button btn-lg
btn-block mb-3"
                    role="button">Edit</a>
                </div>

                <div class="col-6 col-md-3 order-3">
                    <form method="post">{% csrf_token %}
                        <input name="offer_status" type="hidden" value="change">
                        <button id="singlebutton_password" name="singlebutton"
                            class="btn primary-button btn-lg btn-block">
                            {% if active %}
                                Deactivate
                            {% else %}
                                Activate
                            {% endif %}
                    </form>
                    </button>
                </div>

                {% endif %}

                {% if user|has_group:"incubator" %}
                <div class="col-6 col-sm-3">
                    <a href="{% url 'power:offers_list' 1 %}" class="btn btn-secondary btn-lg btn-block
mb-3"
                    role="button">Back</a>
                </div>
            </div>
        </div>
    </div>

```



```

        </div>

        {% endif %}

    </div>
</div>
</div>
</div>

{% endblock content %}

{% block extra_js %}

{% if vue_documents %}
<script type='text/javascript'>
    var documents = {{ vue_documents | safe }}
</script>

{% endif %}

<script src="https://cdn.jsdelivr.net/npm/lodash@4.13.1/lodash.min.js"></script>
<link
href="https://cdnjs.cloudflare.com/ajax/libs/codemirror/5.48.4/codemirror.min.css"
type="text/css" />
rel="stylesheet"
<link
href="https://uicdn.toast.com/editor/2.5.2/toastui-editor.min.css"
type="text/css" />
rel="stylesheet"
<script src="https://uicdn.toast.com/editor/2.5.2/toastui-editor-all.min.js"></script>
<script src="{% static 'js/components/create_toastui_editor.js' %}"></script>
<script src="{% static 'js/components/offer_preview.js' %}"></script>

{% endblock extra_js %}

```

7. Database schema of the POWER platform

23. auth_group

```

create table auth_group
(
    id serial not null
        constraint primary key,
    name varchar(150) not null
        constraint unique auth_group_name_key
);

create index auth_group_name_a6ea08ec_like
on auth_group (name);

```

24. power_customuser

```

create table power_customuser
(
    id serial not null
        constraint primary key,
    password varchar(128) not null,
    last_login timestamp with time zone,
    is_superuser boolean not null,
    first_name varchar(30) not null,

```



```

last_name          varchar(150)          not null,
is_staff           boolean          not null,
is_active          boolean          not null,
date_joined        timestamp with time zone not null,
account_type       varchar(30)      not null,
email              varchar(254)     not null
                constraint          power_customuser_email_key
                unique
);

create index power_customuser_email_0088d166_like
on power_customuser (email);

```

25. power_customuser_groups

```

create table power_customuser_groups
(
    id serial not null
        constraint primary power_customuser_groups_pkey
        key,
    customuser_id integer not null
        constraint power_customuser_gro_customuser_id_f47169a6_fk_power_cus
        references power_customuser
        deferrable initially deferred,
    group_id integer not null
        constraint power_customuser_groups_group_id_a8db51ed_fk_auth_group_id
        references auth_group
        deferrable initially deferred,
    constraint power_customuser_groups_customuser_id_group_id_0bb84155_uniq
        unique (customuser_id, group_id)
);

create index power_customuser_groups_customuser_id_f47169a6
on power_customuser_groups (customuser_id);

create index power_customuser_groups_group_id_a8db51ed
on power_customuser_groups (group_id);

```

26. power_incubatorprofile

```

create table power_incubatorprofile
(
    id serial not null
        constraint primary power_incubatorprofile_pkey
        key,
    incubator_name varchar(200) not null,
    country varchar(200) not null,
    user_id integer not null
        constraint power_incubatorprofile_user_id_key
        unique
        constraint power_incubatorprofile_user_id_f5e7894c_fk_power_customuser_id
        references power_customuser
        deferrable initially deferred,
    city varchar(200) not null,
    description text not null,
);

```



```

    emblem                                varchar(100)    not    null,
    industry_sector    text                                not    null
  );

```

```

create                                table                                power_isced
(
  id                                serial                                not    null
    constraint                                power_isced_pkey
    primary                                key,
  area_of_studies    varchar(250)    not    null
);

```

27. power_joboffer

```

create                                table                                power_joboffer
(
  id                                serial                                not    null
    constraint                                power_joboffer_pkey
    primary                                key,
  offer_name                                varchar(200)    not    null,
  description                                text                                not    null,
  country                                varchar(200)    not    null,
  city                                text                                not    null,
  availability_offering_from    date                                not    null,
  availability_offering_to    date                                not    null,
  job_period_from                                double    precision,
  job_period_to                                double    precision,
  paid                                varchar(1),
  job_type                                varchar(3),
  languages                                text                                not    null,
  skills                                text                                not    null,
  responsibilities                                text                                not    null,
  benefits                                text                                not    null,
  active                                boolean                                not    null,
  startup_id                                integer                                not    null
    constraint                                power_joboffer_startup_id_6606f079_fk_power_startupprofile_id
    references                                power_startupprofile
    deferrable                                initially    deferred
);

create                                index                                power_joboffer_startup_id_6606f079
on                                power_joboffer

```

28. power_jobofferdocuments

```

create                                table                                power_jobofferdocuments
(
  id                                serial                                not    null
    constraint                                power_jobofferdocuments_pkey
    primary                                key,
  document                                varchar(100)    not    null,
  job_offer_id    integer                                not    null
);

```



```

constraint power_jobofferdocume_job_offer_id_ca6e47d6_fk_power_job
references power_joboffer
deferrable initially deferred
);
create index power_jobofferdocuments_job_offer_id_ca6e47d6
on power_jobofferdocuments (job_offer_id);

```

29. power_jobofferstudentdocuments

```

create table power_jobofferstudentdocuments
(
  id serial not null
  constraint power_jobofferstudentdocuments_pkey
  primary key,
  name_of_file varchar(100) not null,
  file varchar(100) not null,
  offer_id integer not null
  constraint power_jobofferstuden_offer_id_9227fd7a_fk_power_job
  references power_joboffer
  deferrable initially deferred,
  student_id integer not null
  constraint power_jobofferstuden_student_id_dee873e2_fk_power_stu
  references power_studentprofile
  deferrable initially deferred
);
create index power_jobofferstudentdocuments_offer_id_9227fd7a
on power_jobofferstudentdocuments (offer_id);
create index power_jobofferstudentdocuments_student_id_dee873e2
on power_jobofferstudentdocuments (student_id);

```

30. power_jobofferstudentdocuments

```

create table power_jobofferstudentdocuments
(
  id serial not null
  constraint power_jobofferstudentdocuments_pkey
  primary key,
  name_of_file varchar(100) not null,
  file varchar(100) not null,
  offer_id integer not null
  constraint power_jobofferstuden_offer_id_9227fd7a_fk_power_job
  references power_joboffer
  deferrable initially deferred,
  student_id integer not null
  constraint power_jobofferstuden_student_id_dee873e2_fk_power_stu
  references power_studentprofile
  deferrable initially deferred
);
create index power_jobofferstudentdocuments_offer_id_9227fd7a
on power_jobofferstudentdocuments (offer_id);

```



```

create on index power_jobofferstudentdocuments_student_id_dee873e2
power_jobofferstudentdocuments (student_id);

```

31. power_startupprofile

```

create table power_startupprofile
(
  id serial not null
      constraint power_startupprofile_pkey
      primary key,
  emblem varchar(100) not null,
  startup_name varchar(200) not null,
  country varchar(200) not null,
  city text not null,
  industry_sector text not null,
  description text not null,
  user_id integer not null
      constraint power_startupprofile_user_id_key
      unique,
      constraint power_startupprofile_user_id_f99f03f4_fk_power_customuser_id
      references power_customuser
      deferrable initially deferred
);

```

32. power_studentprofile

```

create table power_studentprofile
(
  id serial not null
      constraint power_studentprofile_pkey
      primary key,
  linkedin varchar(200) not null,
  area_of_studies varchar(200) not null,
  degree varchar(3) not null,
  home_institution varchar(200) not null,
  country varchar(200) not null,
  skills text not null,
  user_id integer not null
      constraint power_studentprofile_user_id_key
      unique,
      constraint power_studentprofile_user_id_8eb341b3_fk_power_customuser_id
      references power_customuser
      deferrable initially deferred,
  languages text not null
);

```

33. power_universityprofile

```

create table power_universityprofile
(
  id serial not null

```



```

constraint primary power_universityprofile_pkey
emblem varchar(100) not null,
university_name_full varchar(200) not null,
university_name_short varchar(200) not null,
country text not null,
linkedin varchar(200) not null,
user_id integer not null
constraint unique power_universityprofile_user_id_key
constraint references power_universityprofile_user_id_366cf35d_fk_power_customuser_id
constraint deferrable initially deferred
);
  
```